




Copyright:Copyright infingmengt reserved

INOVANCE

A3


Amendment	Description

Unit:Millimeter(mm)

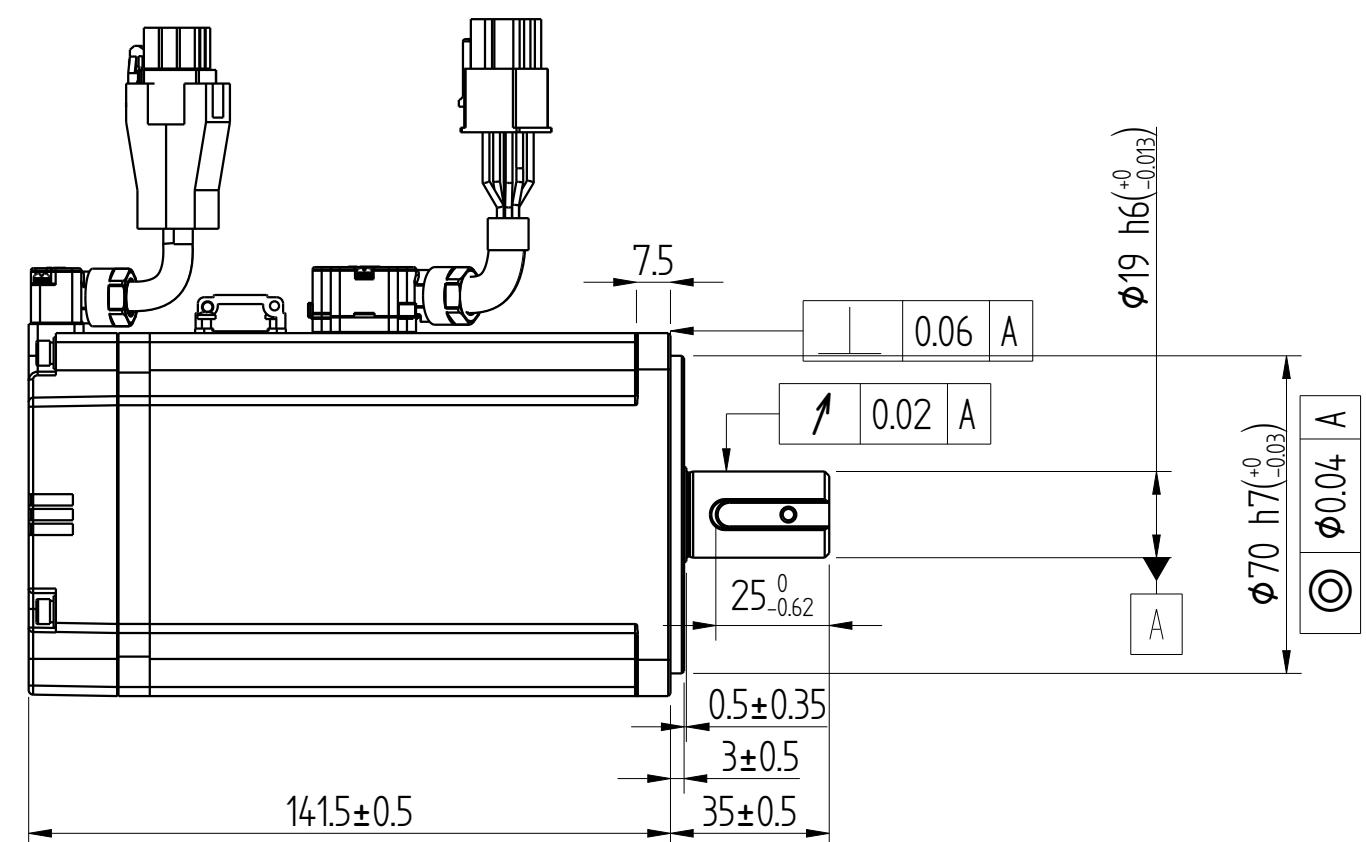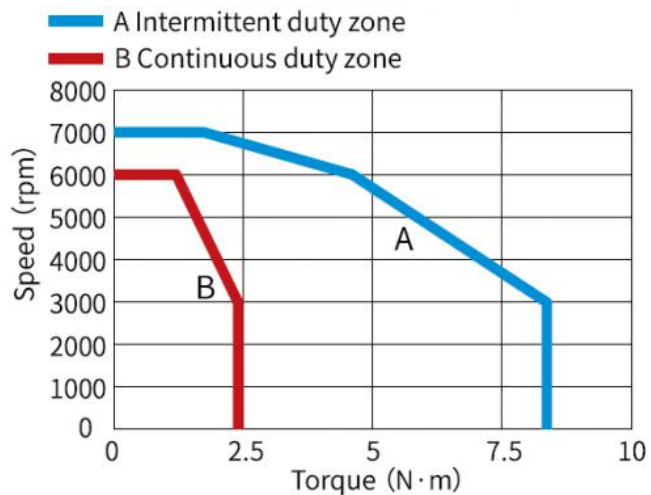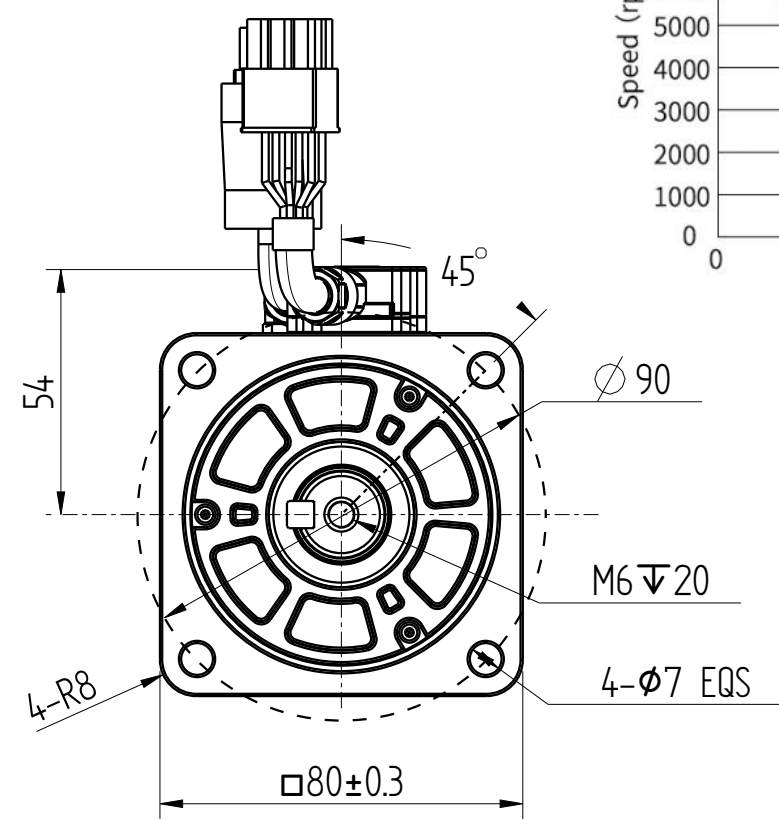

Basic function parameters	
Rated power kW	0.75
Rated voltage V	220
Rated current A	4.4
Peak current at rated speed A	16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm <sup>2</sup>	0.71±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection class	IP67
Static torque of brake Nm	≥32
Brake power supply V	DC24±10%
Brake backlash°	≤1
Duty cycle	S1
Radial load N	≤392
Axial load N	≤147


Encoder adapter connector



Encoder adapter connector

9pin terminal	3	6	1	4	9	8	7
Core color	blue	purple	brown	black	red	orange	groud wire
definition	PS+	PS—	DC+	DC—	+5V	0V	shield
	Pair		Pair		Pair		


Power wire adapter connector




Power wire adapter connector

6pin terminal	5	4	2	1	3	6
Core color	chartreuse	red	yellow	white	brown	blue
definition	PE	W	V	U	BK+	BK—


note:  
1、The lead wire cable length about 300mm

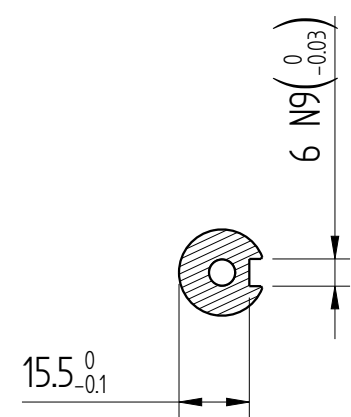

Dimension of shaft end

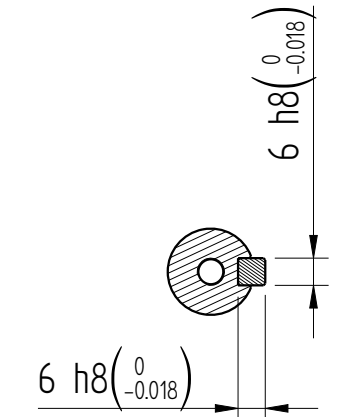

Dimension of shaft end with key

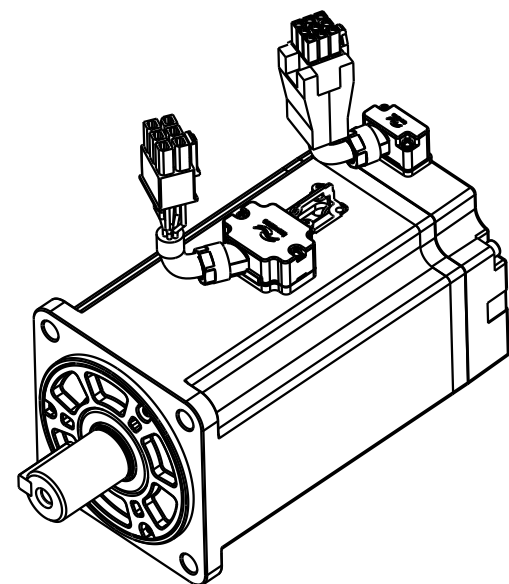

				Motor Outline Drawing			0111A189-WX	
B01	Replace	/	20250527					
Version	Change method	Changed by	Date					
Design	/			/			Mark	
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			kg	12	B01	Model	MS1H1-75B30CB-A334R-S-INT
Approve	/							