

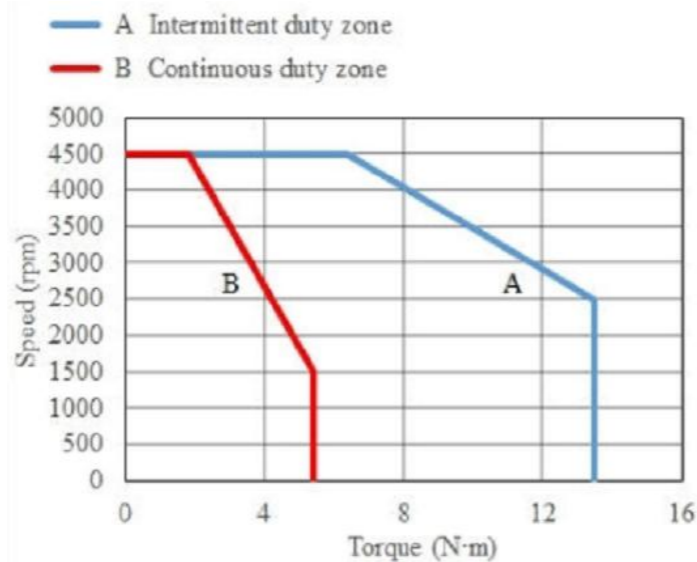
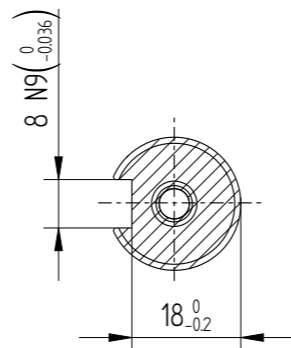


A3


Basic function patmeters	
Rated power kW	0.85
Rated voltage V	220
Rated current A	6.6
Peak current at rated speed A	17.2
Rated torque Nm	5.39
Peak torque at rated speed Nm	13.5
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg · cm ²	15.8±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	≥16
Brake power supply V	DC24±10%
Brake backlash°	≤1
Duty cycle	S1
Radial load N	≤686
Axial load N	≤196

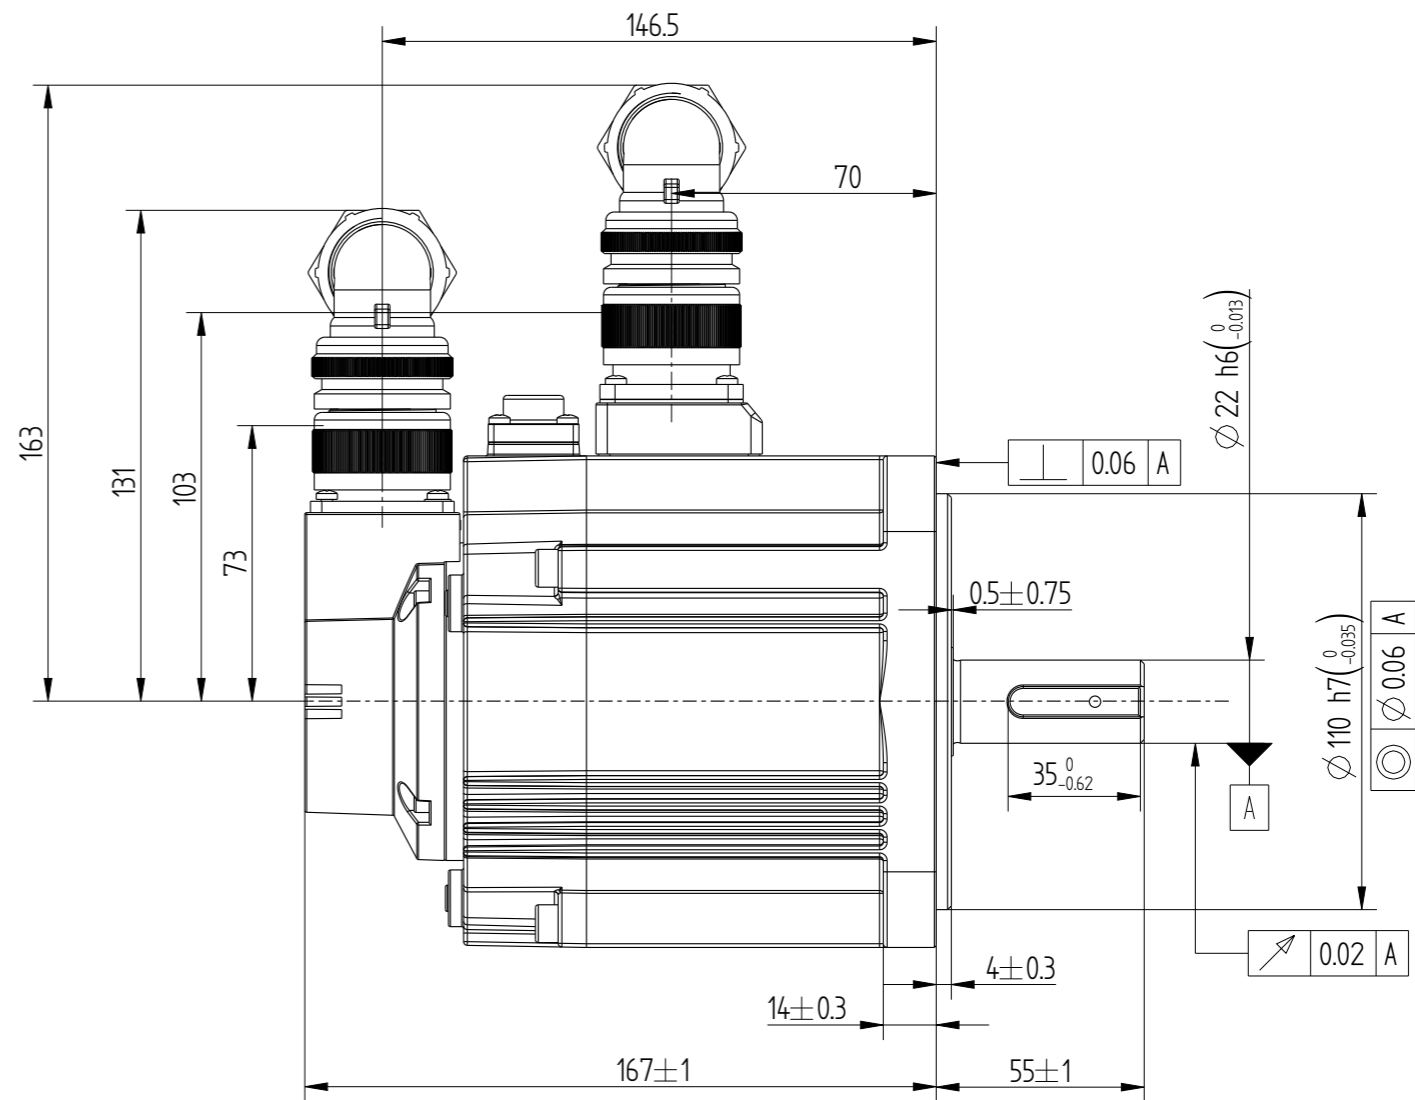


Unit: Millimeter (mm)

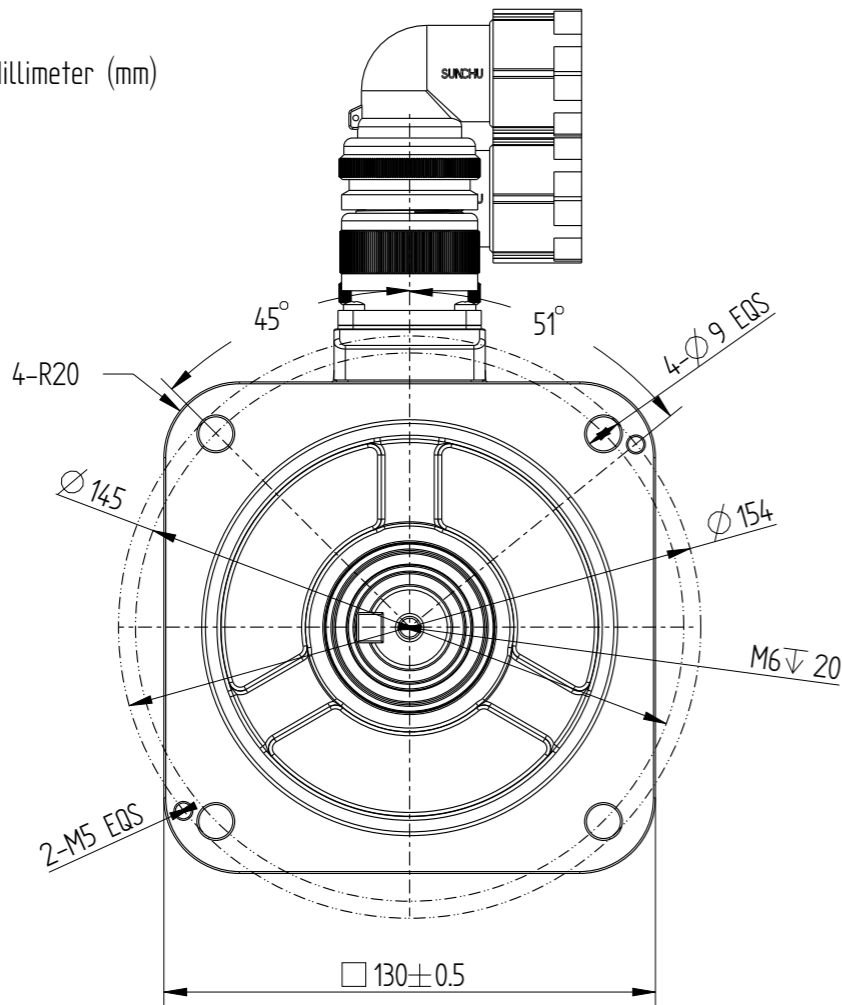


Dimension of shaft end

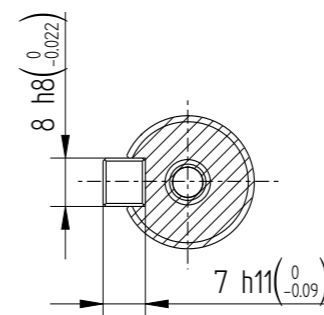

Dimension of shaft end with key

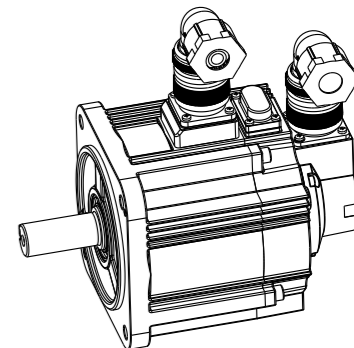

				Motor outline Drawing			01118007-WX		
B02	Replace	/	/						
Version	Change method	Changed by	Date						
Design	/								
Check	/			/			Mark		
Craft	/								
Verify	/			Weight	Scale	Version	Page 1 of 1		
stangardization	/			7.7kg	12	B02	Model		MS1H3-85B15CB-A334R-INT
Approve	/								