
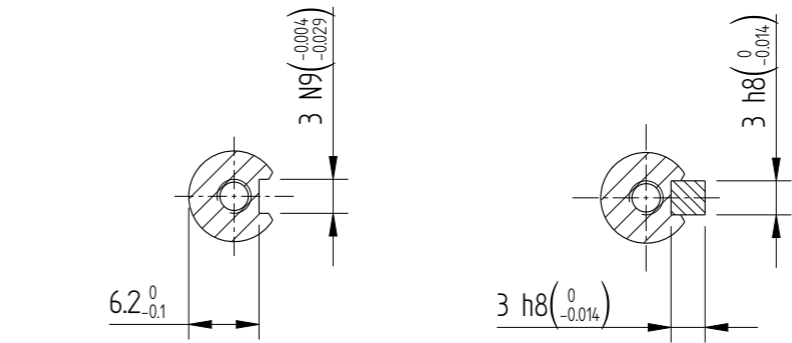



A3


Basic function parameters	
Rated power kW	0.05
Rated voltage V	220
Rated current A	1.27
Peak current at rated speed A	4.78
Rated torque Nm	0.16
Peak torque at rated speed Nm	0.56
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm <sup>2</sup>	0.038±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection class	IP67
Static torque of brake Nm	/
Brake power supply V	/
Brake backlash°	/
Duty cycle	S1
Radial load N	≤78
Axial load N	≤54

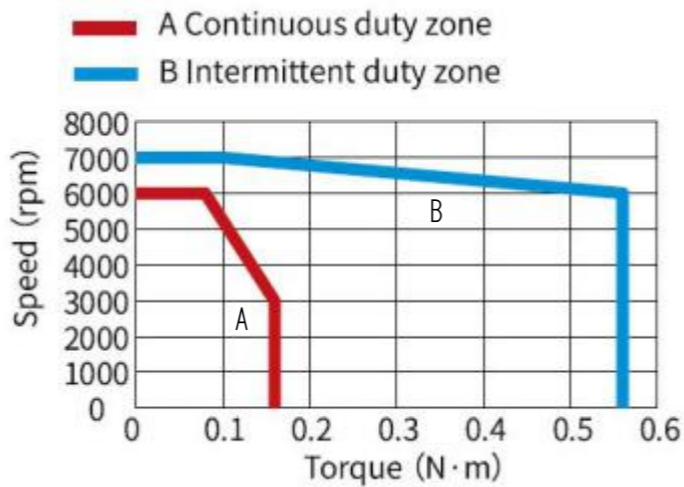

Dimension of shaft end

Dimension of shaft end with key

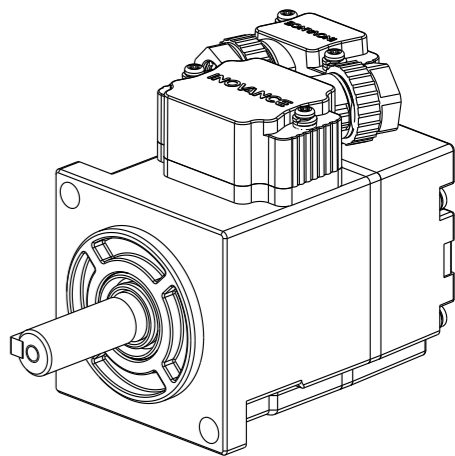

				Motor Outline Drawing			01119480-WX		
B01	Replace	/	20250530						
Version	Change method	Changed by	Date						
Design	/			/			Mark		<b>INOVANCE</b>
Check	/								
Craft	/								
Verify	/								
Standardization	/			Weight	Scale	Version	Page 1 of 1		
Approve	/			0.26kg	1:2	B01	Model	MS1H4-05B30CB-A331R-INT	