

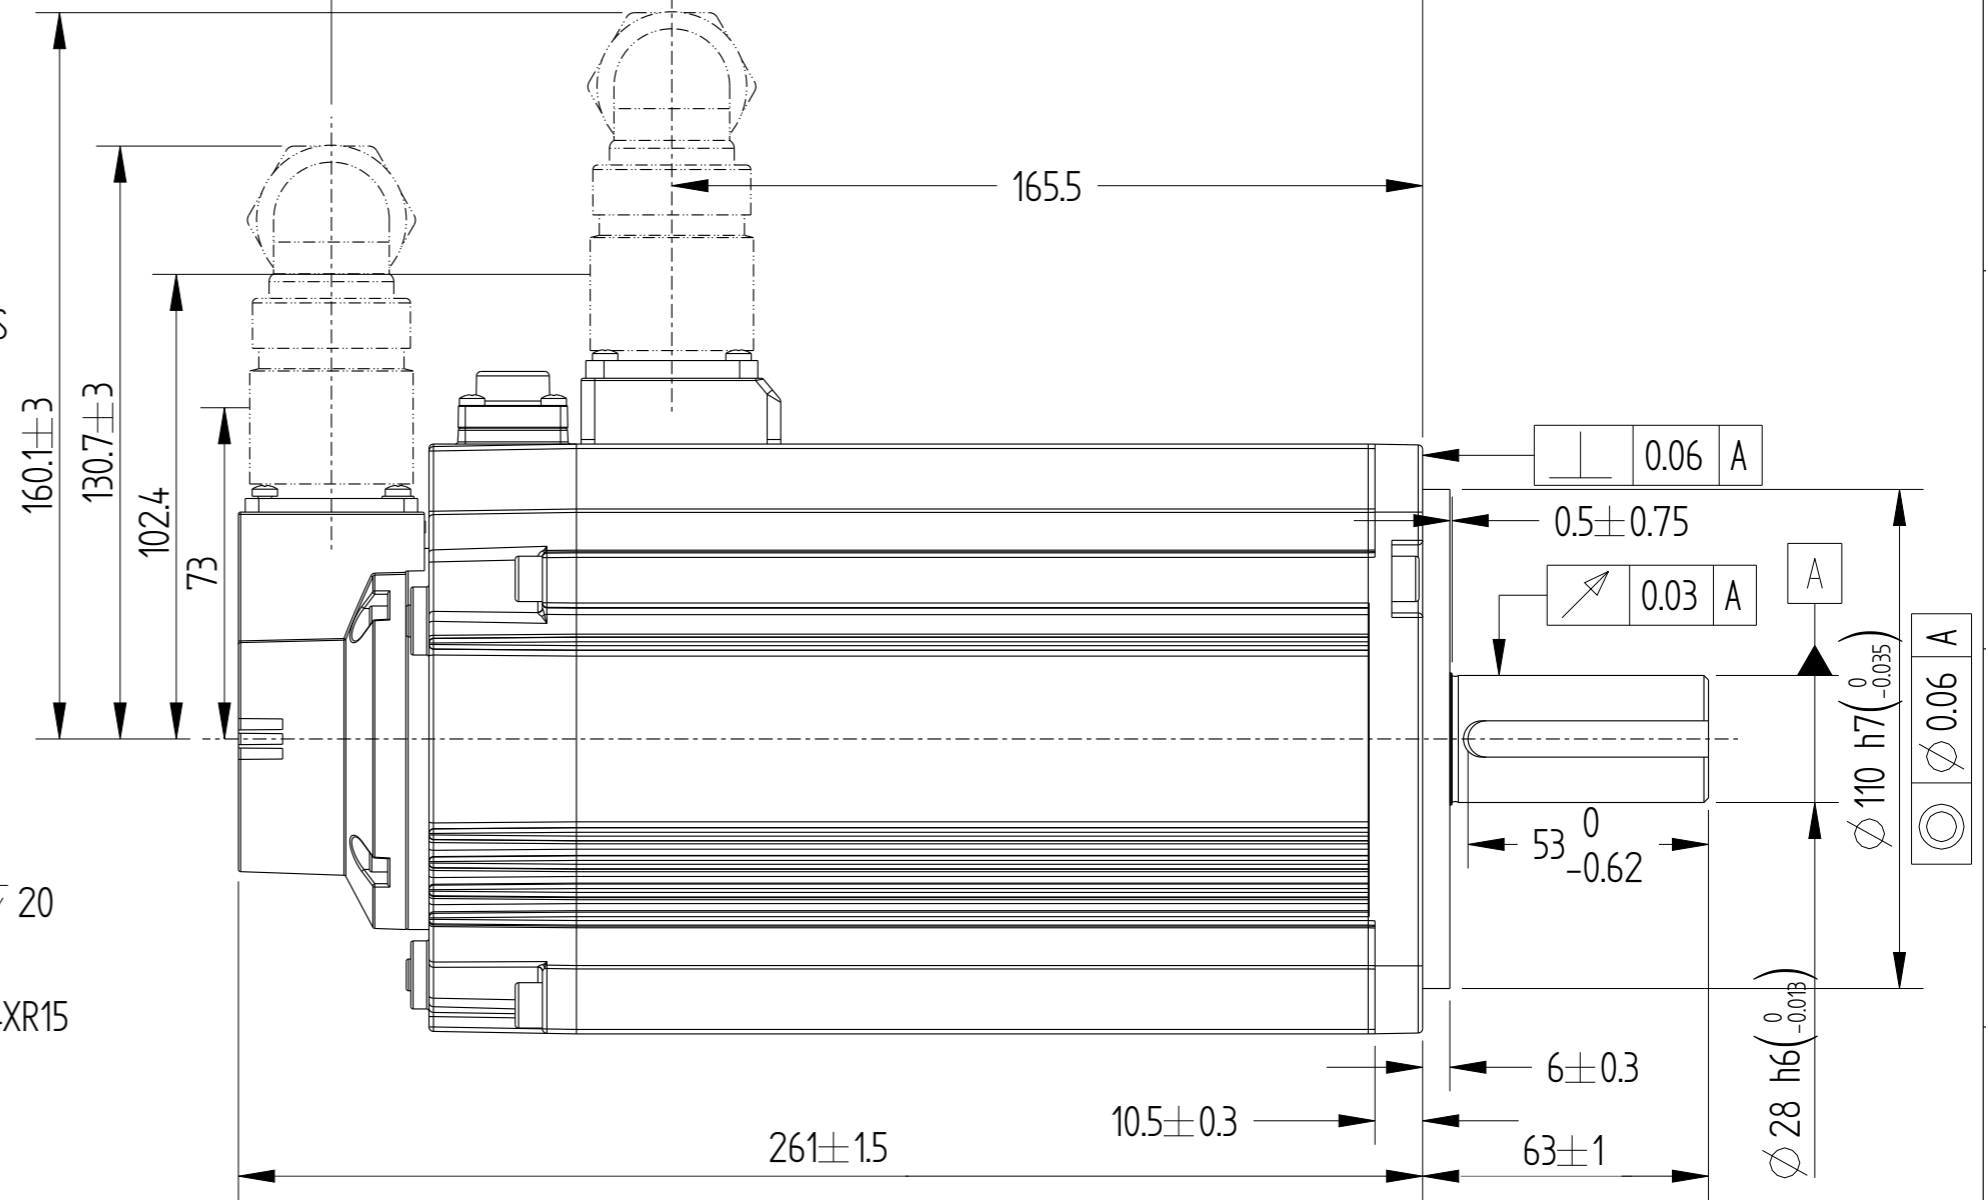
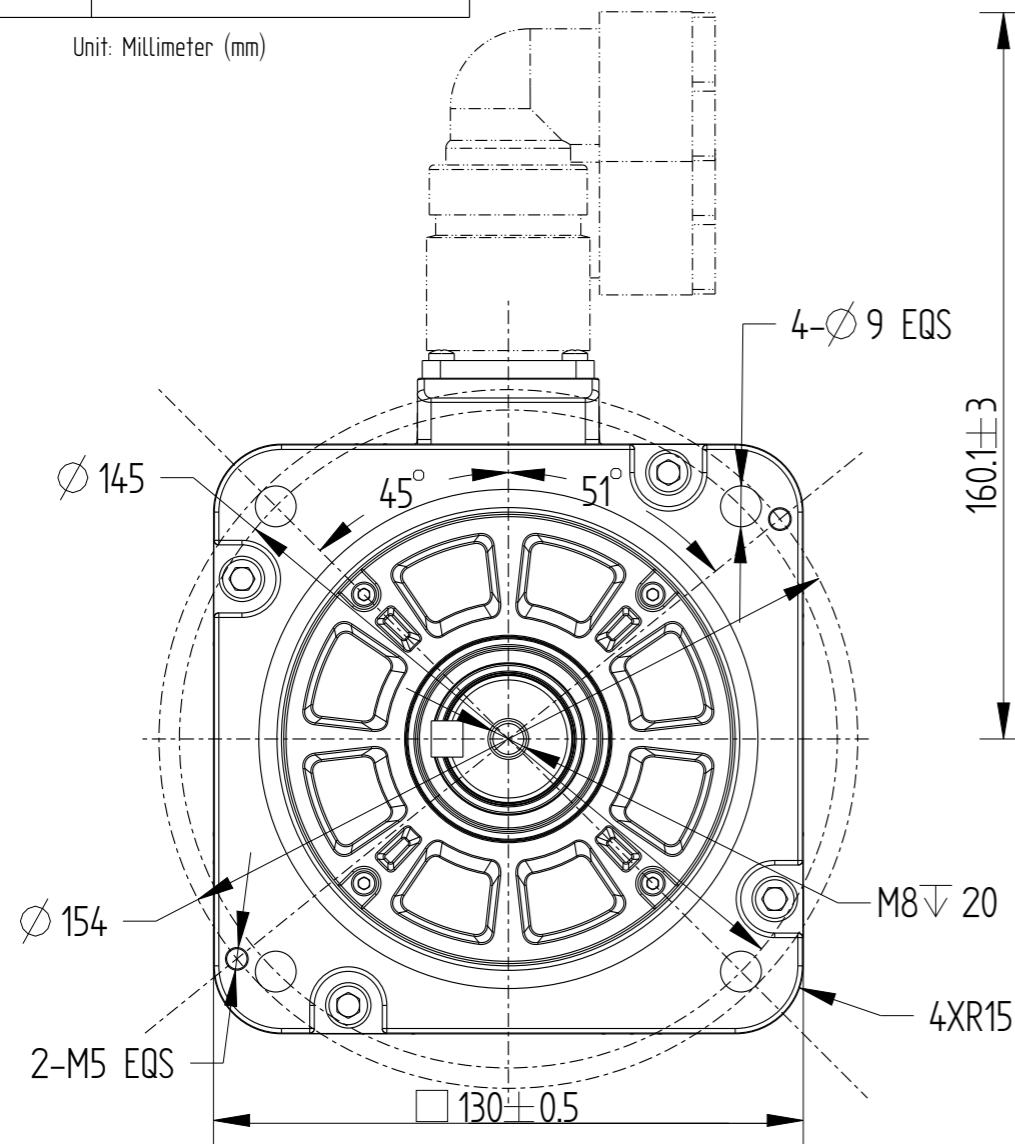


Amendment	Description

Unit: Millimeter (mm)

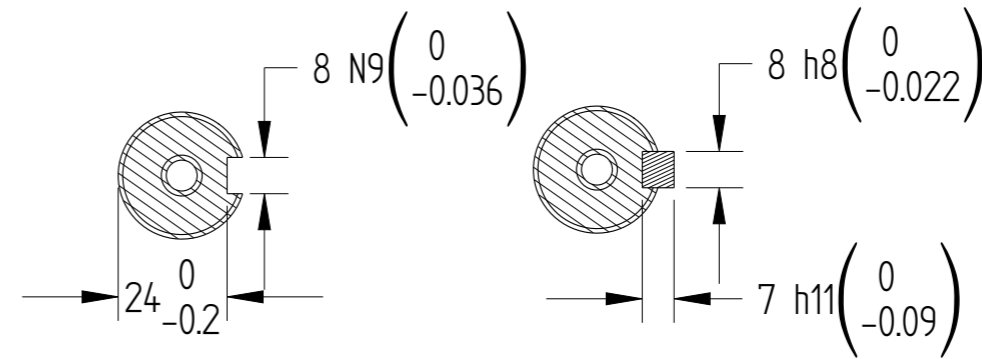



Basic function parameters	
Rated power KW	4
Rated voltage V	380
Rated current A	13.5
Peak current at rated speed A	42.5
Rated torque Nm	12.6
Peak torque at rated speed Nm	37.8
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg·cm ²	11.98±10%
Encoder resolution	23bit
Insulation class	F(155)
Protection level	IP67
Static torque of brake Nm	≥16
Brake power supply V	DC24±10%
Brake backlash°	≤1
Duty cycle	S1
Radial load N	≤1176
Axial load N	≤392

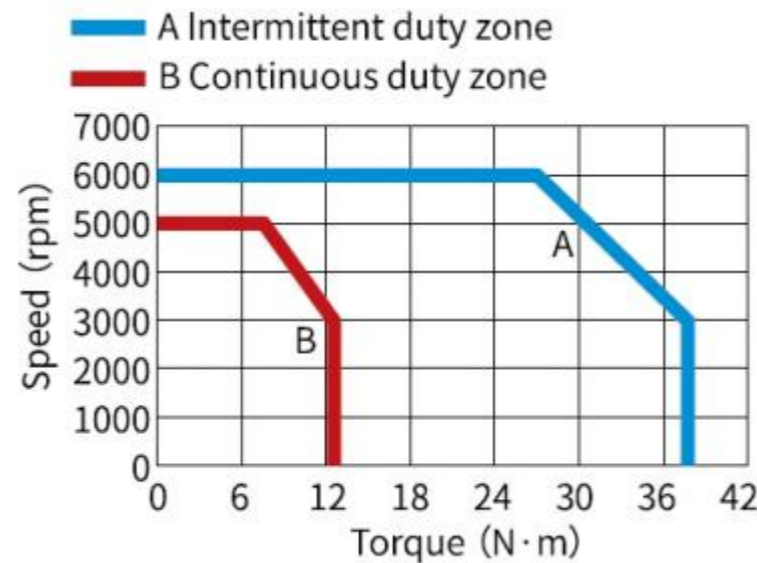

Dimension of shaft end

Dimension of shaft end with key

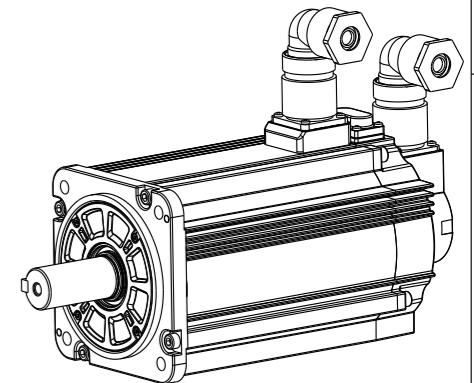

				Motor Outline Drawing			01117935-WX	
B02	Replace	/	/					
B00	New Archive	/	/					
Version	Change method	Changed by	Date	/			<div>Mark</div> <div></div> <div>INOVANCE</div>	
Design	/							
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			15.1kg	3:5	B02	Model	MS1H2-40C30□-A334R-INT
Approve	/							