
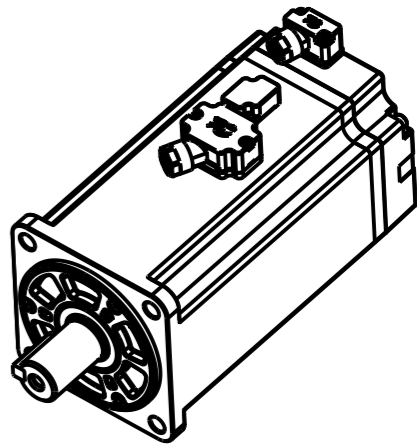
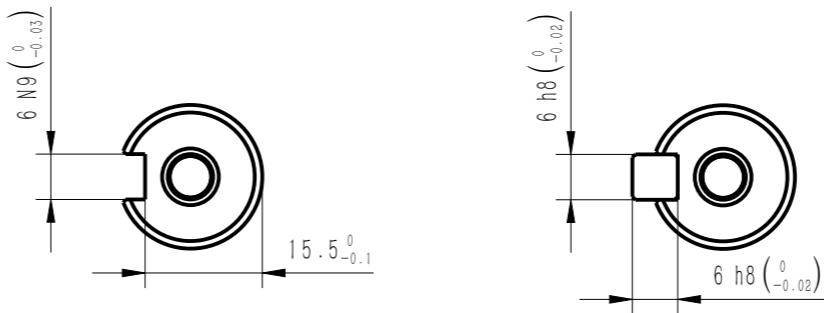
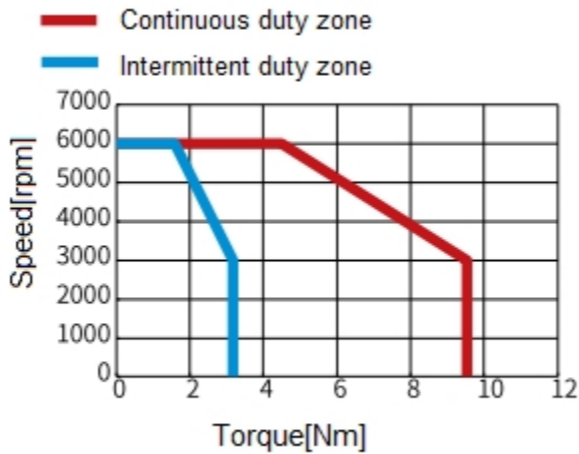
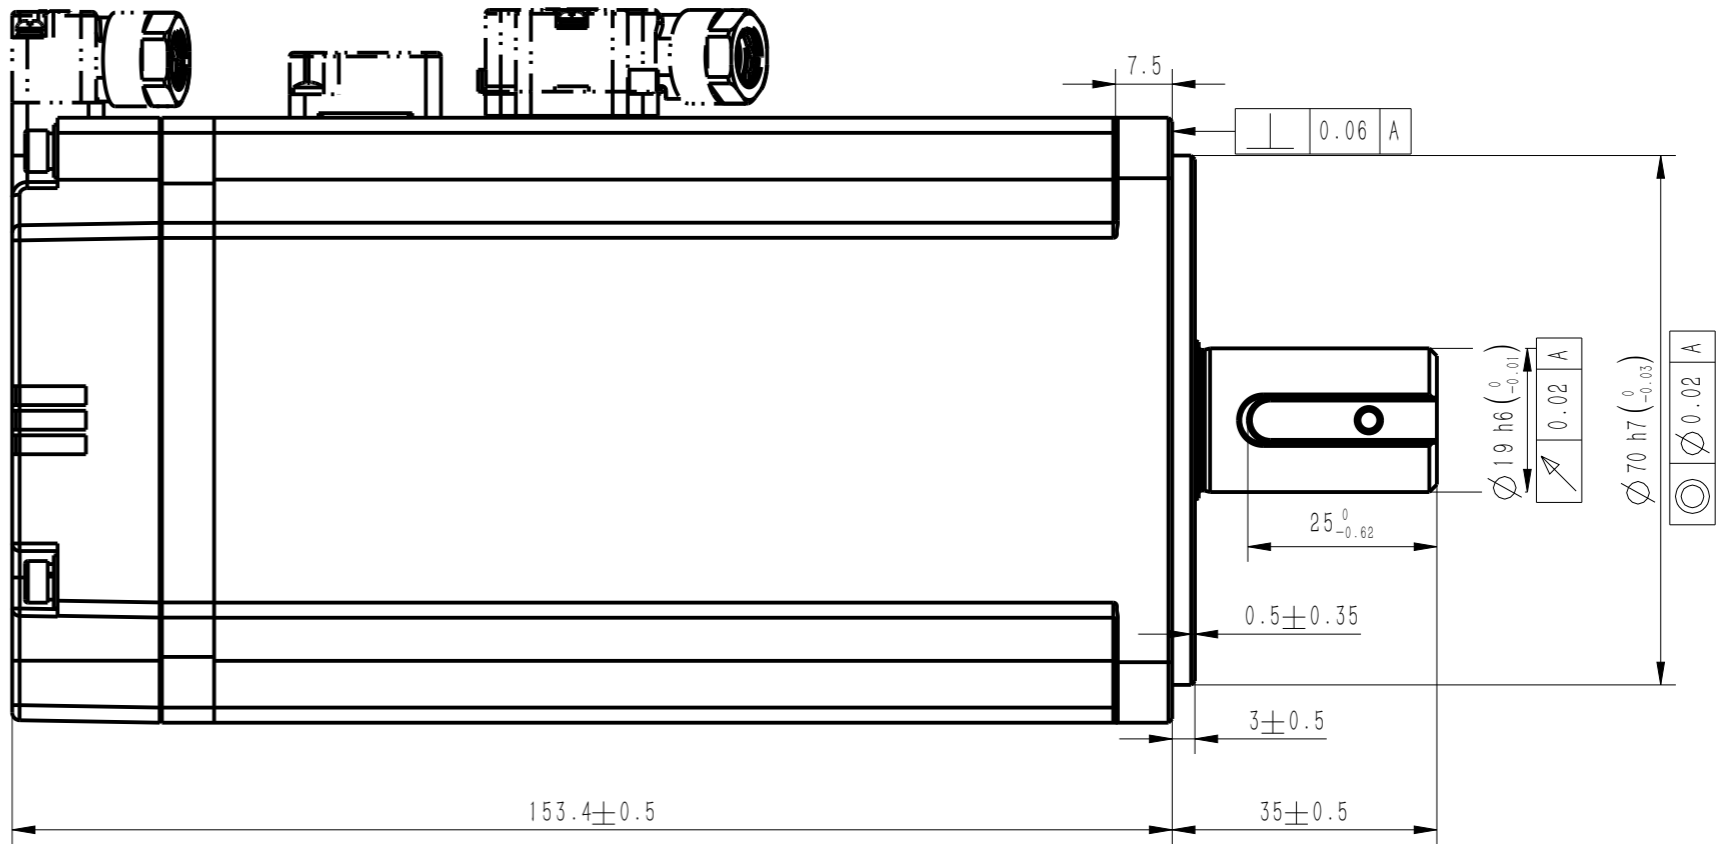


正样
2023.09.26
B00

Copyright: Copyright infringement reserved.

外部公开

Unit: Millimeter (mm)

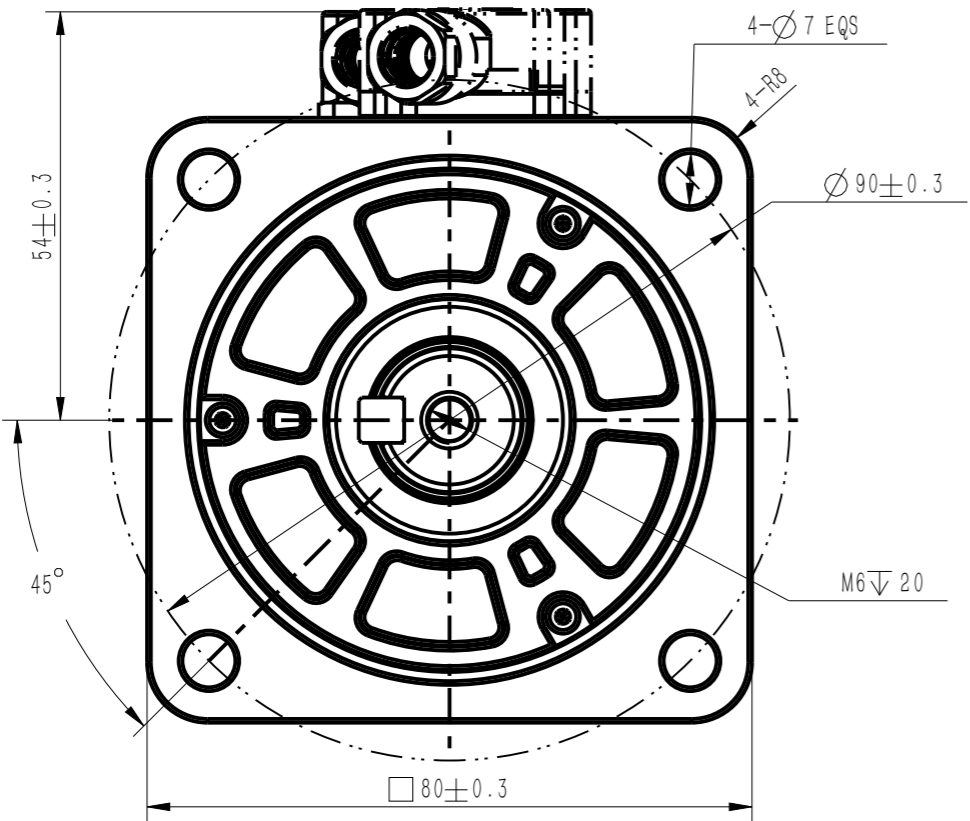

Basic function parameters	
Rated power KW	1
Rated voltage V	220
Rated current A	≤ 6.2
Peak current at rated speed A	≤ 24
Rated torque Nm	3.18
Peak torque at rated speed Nm	11.1
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg·cm ²	0.87
Encoder resolution	23bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	≥ 3.2
Brake power supply	24
Duty cycle	S1
Radial line load N	≤ 392
Axial load N	≤ 147

				Motor Outline Drawing			01117858-WX	
B00	New Archive	/	20230901					
Version	Change method	Changed by	Date					
Design	/			<div></div>			Mark	INOVANCE
Check	/							
Craft	/							
Verify	/							
Standardization	/			Weight	Scale	Version	Page 1 of 1	
Approve	/			3.27 kg	1:1	B00	Model	MS1H1-10C30CB-A334R-INT