
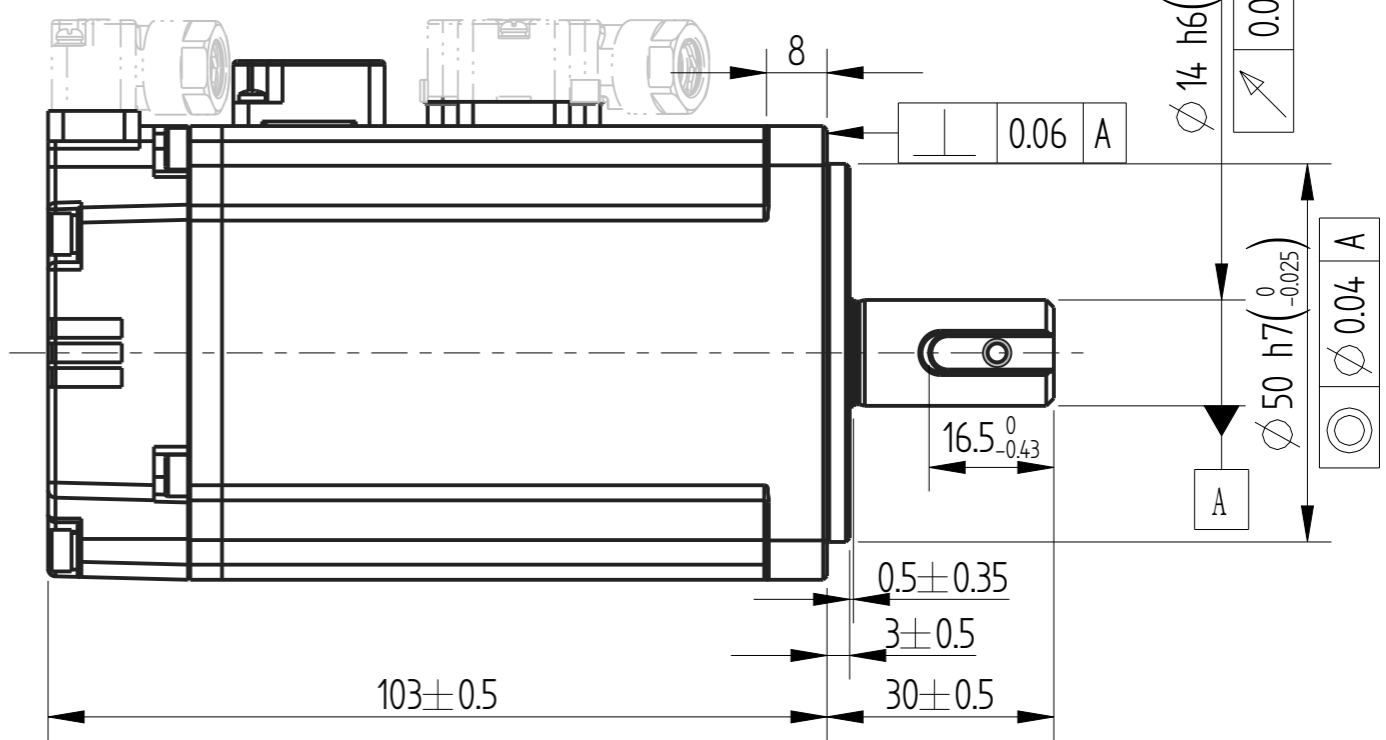




正样
2023.09.25
B00

外部公开

Copyright:Copyright infringement reserved.

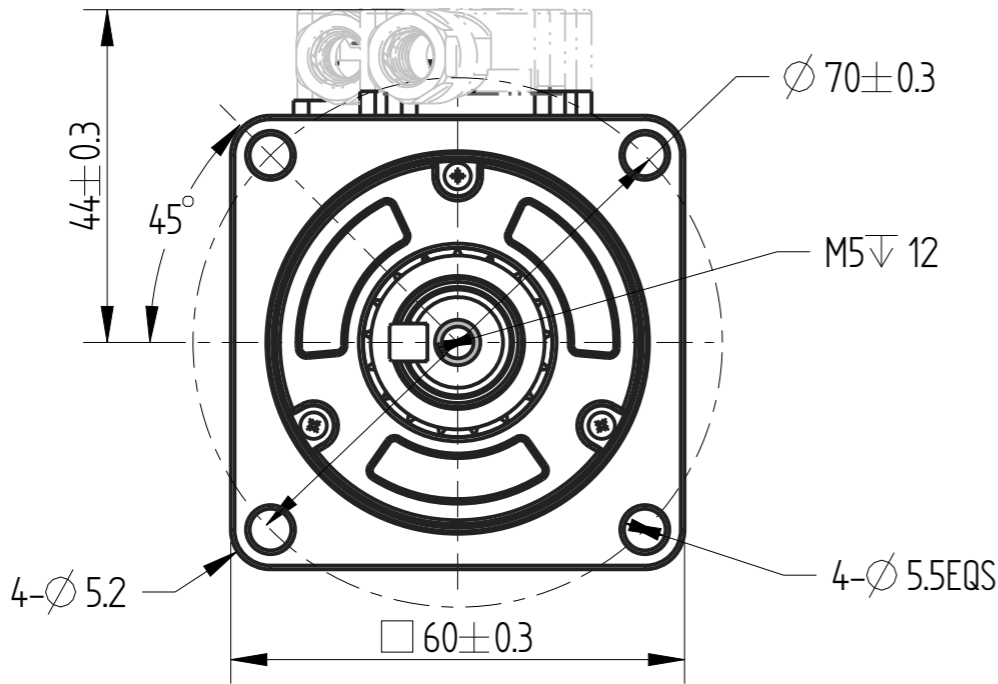


Continuous duty zone
Intermittent duty zone

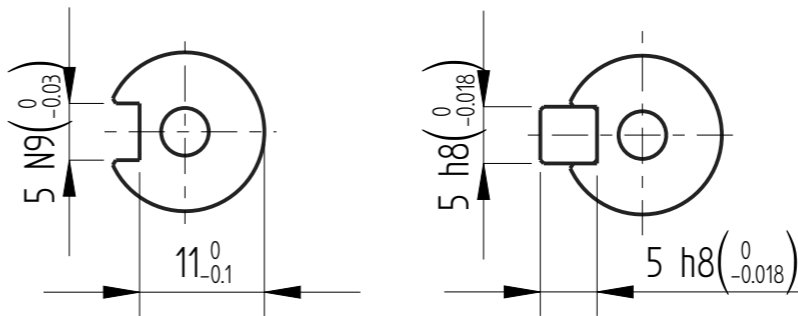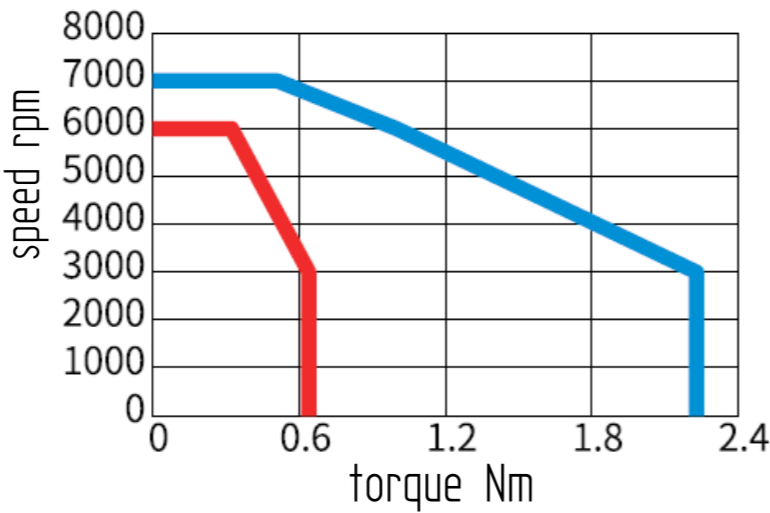


Dimension of shaft end

Dimension of shaft end with key

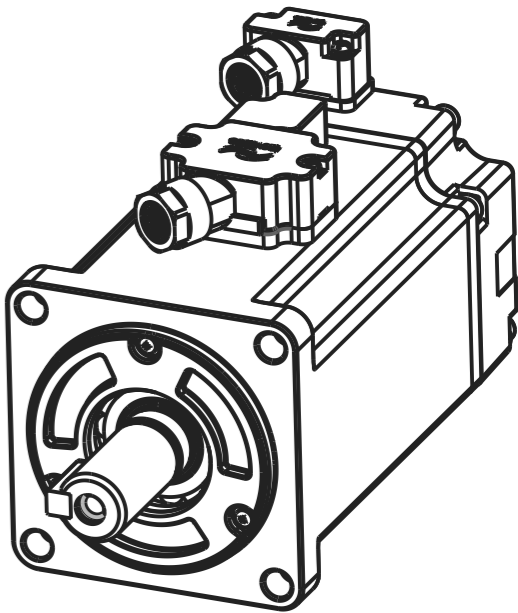

Basic function parameters	
Rated power KW	0.2
Rated voltage V	220
Rated current A	≤15
Peak current at rated speed A	≤5.8
Rated torque Nm	0.64
Peak torque at rated speed Nm	2.24
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm2	0.106
Encoder resolution	23bit
Insulation class	F
Protection Level	IP67
Static torque of brake Nm	≥15
Brake power supply	DC24±10%
Duty cycle	S1
Radial line load N	≤245
Axial load N	≤74

				Motor outline drawing			01117856-WX	
B00	New Archive	/	20230901					
Version	Change method	Change by	Date					
Design	/			/			Mark	 INOVANCE
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			/	1:1	B00	Model	MS1H1-20B30CB-A334R-INT
Approve	/							