
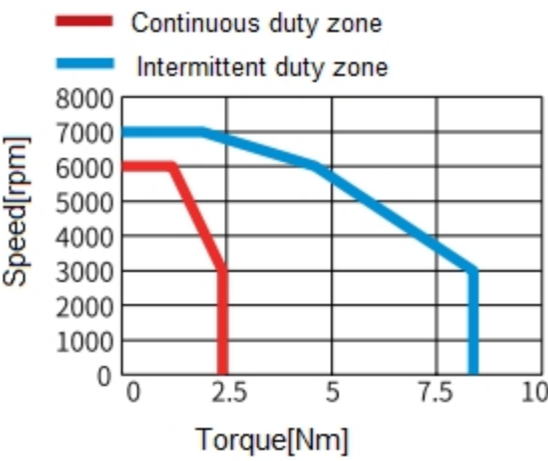
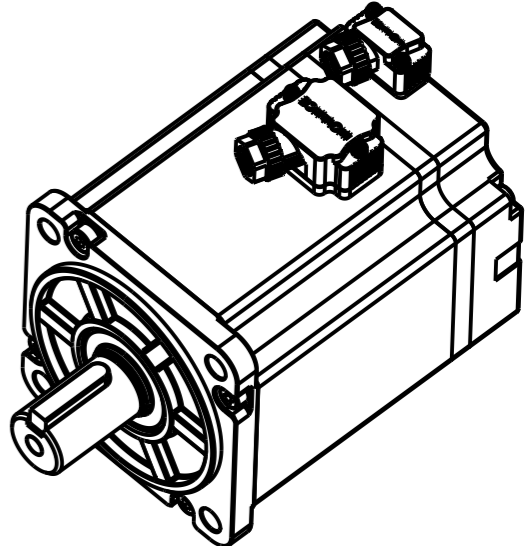
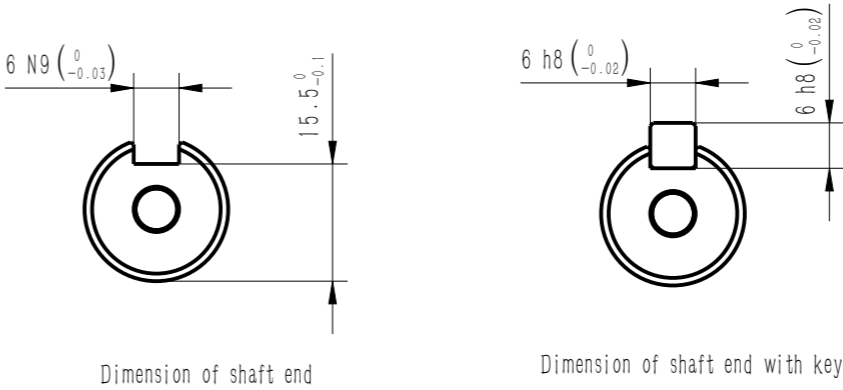
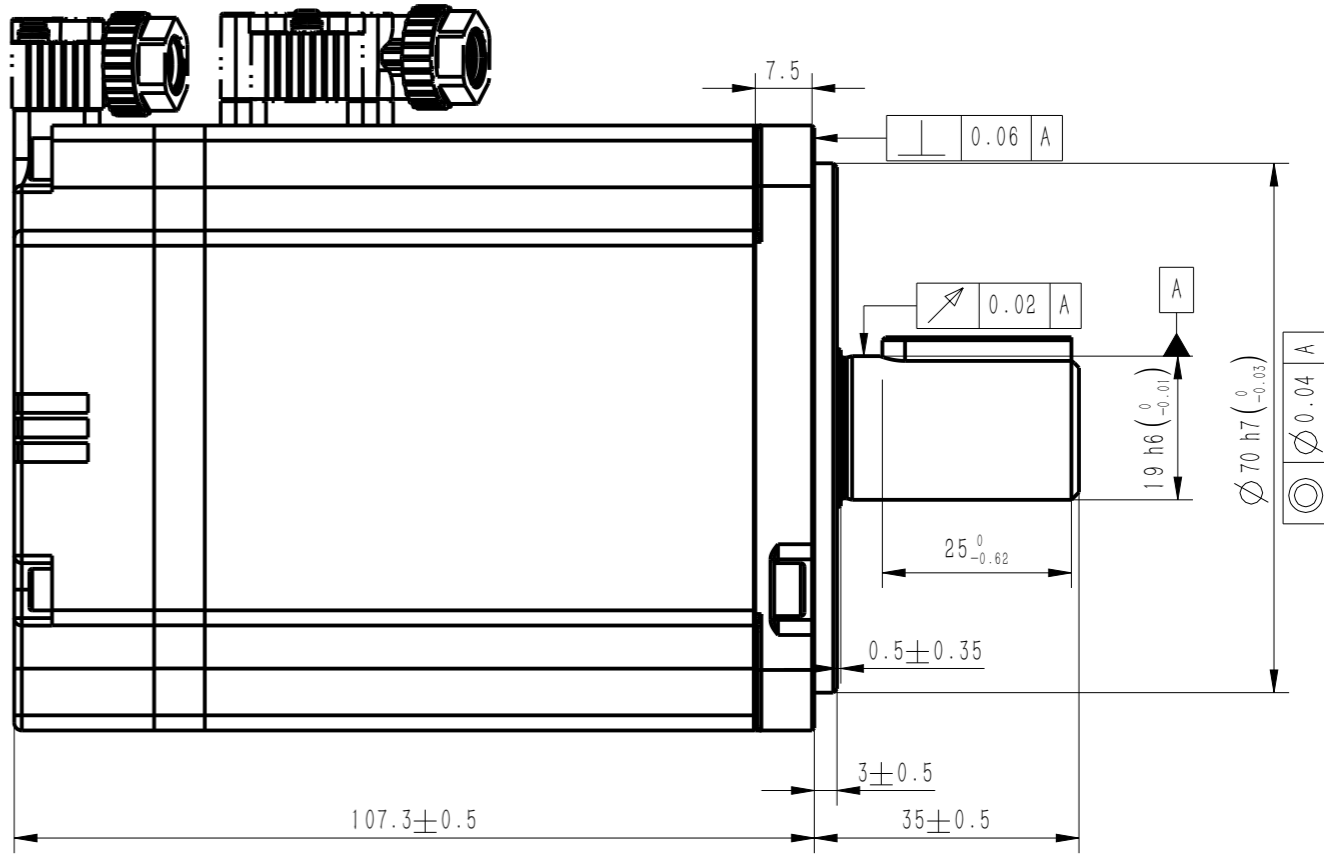


正样  
2023.09.26  
B00


Copyright: Copyright infringement reserved

外部公开

Unit: Millimeter (mm)

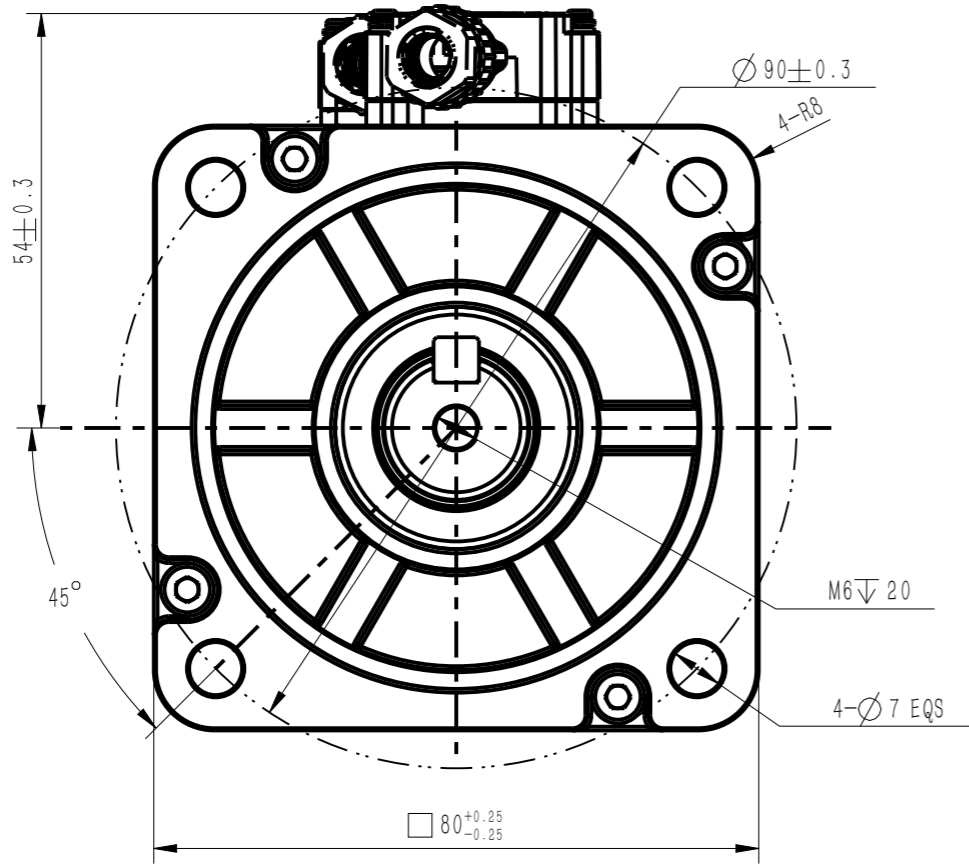

Basic function parameters	
Rated power KW	0.75
Rated voltage V	220
Rated current A	≤4.4
Peak current at rated speed A	≤16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm2	0.68
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147

				Motor Outline Drawing			01118372-WX		
B00	New Archive	/	20230828						
Version	Change method	Changed by	Date						
Design	/						Mark	 <b>INOVANCE</b>	
Check	/								
Craft	/								
Verify	/			Weight	Scale	Version	Page 1 of 1		
Standardization	/			2.22kg	1 : 1	B00	Model	MS1H1-75B30CB-S631R-INT	
Approve	/								