



正样
202301.16
B01



INOVANCE

F





A3

Copyright: Copyright infringement reserved


外部公开

Amendment	Description

Unit: Millimeter (mm)

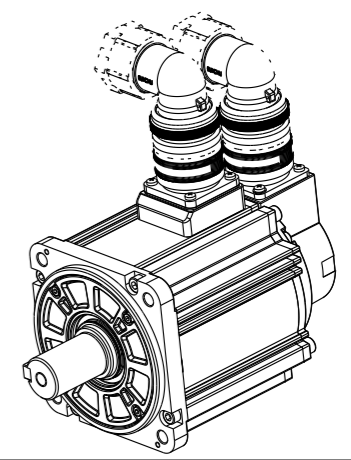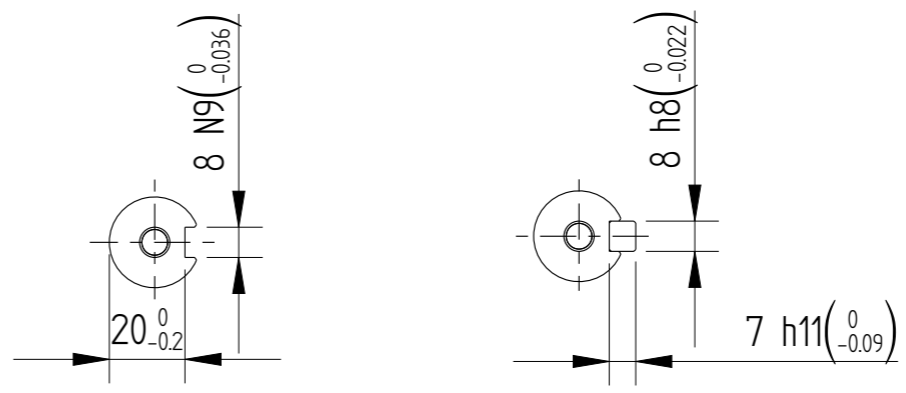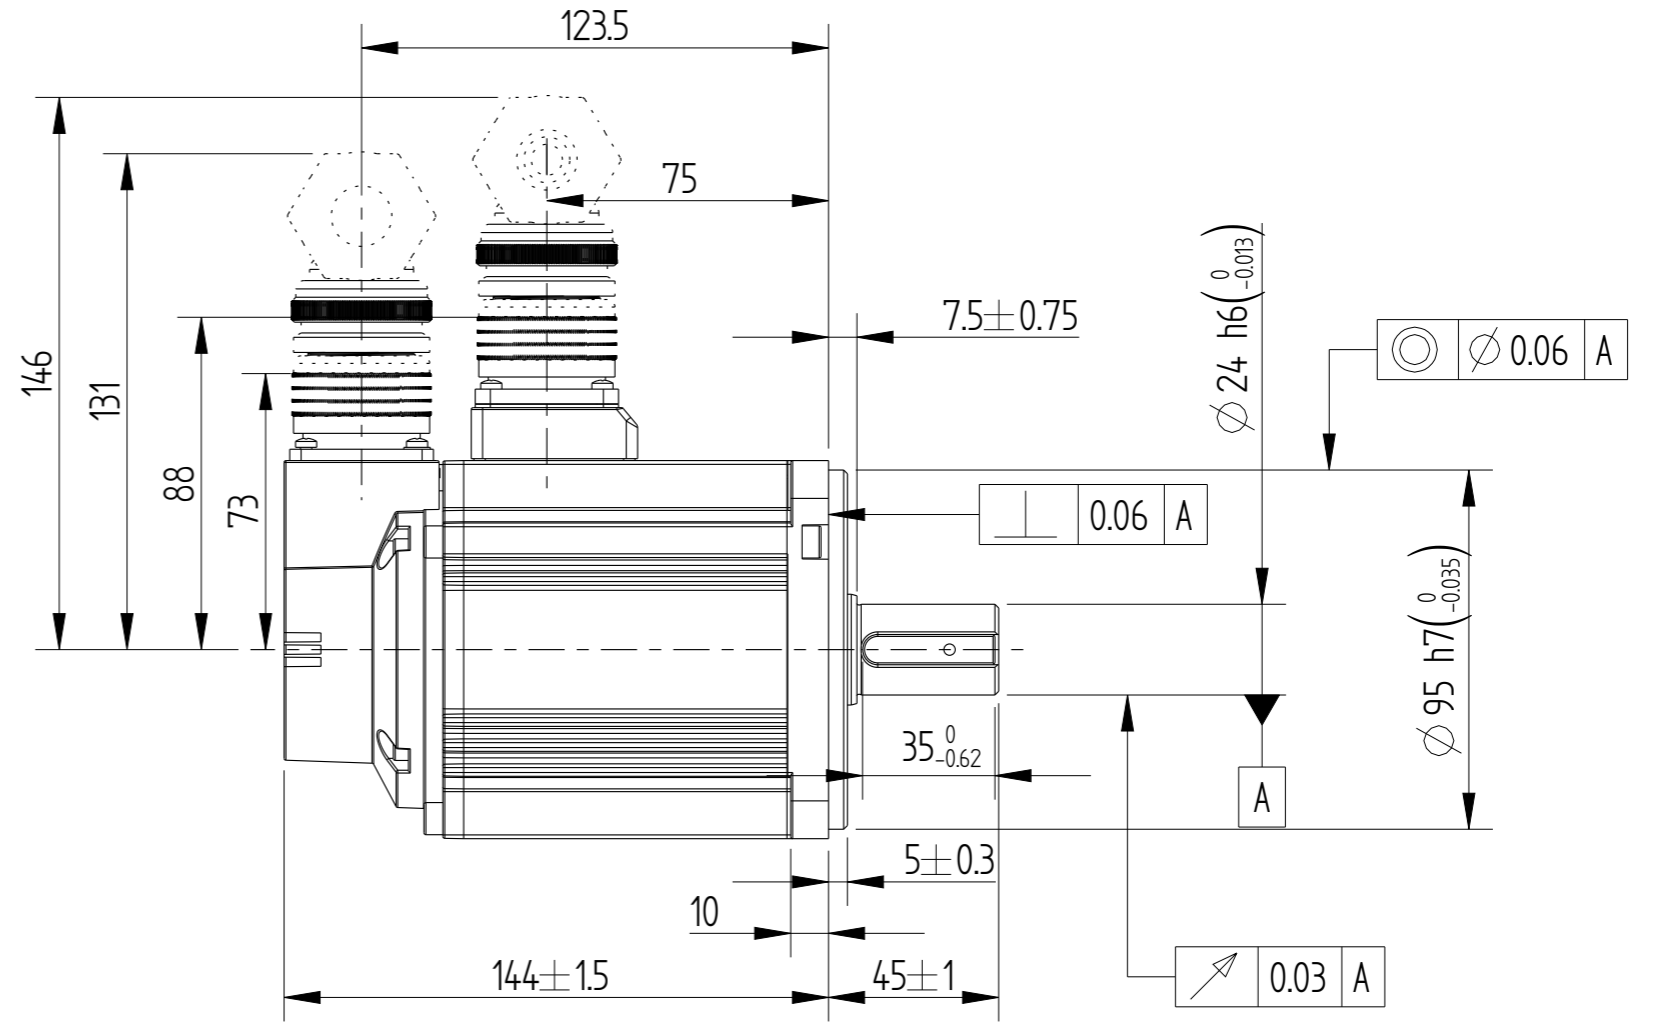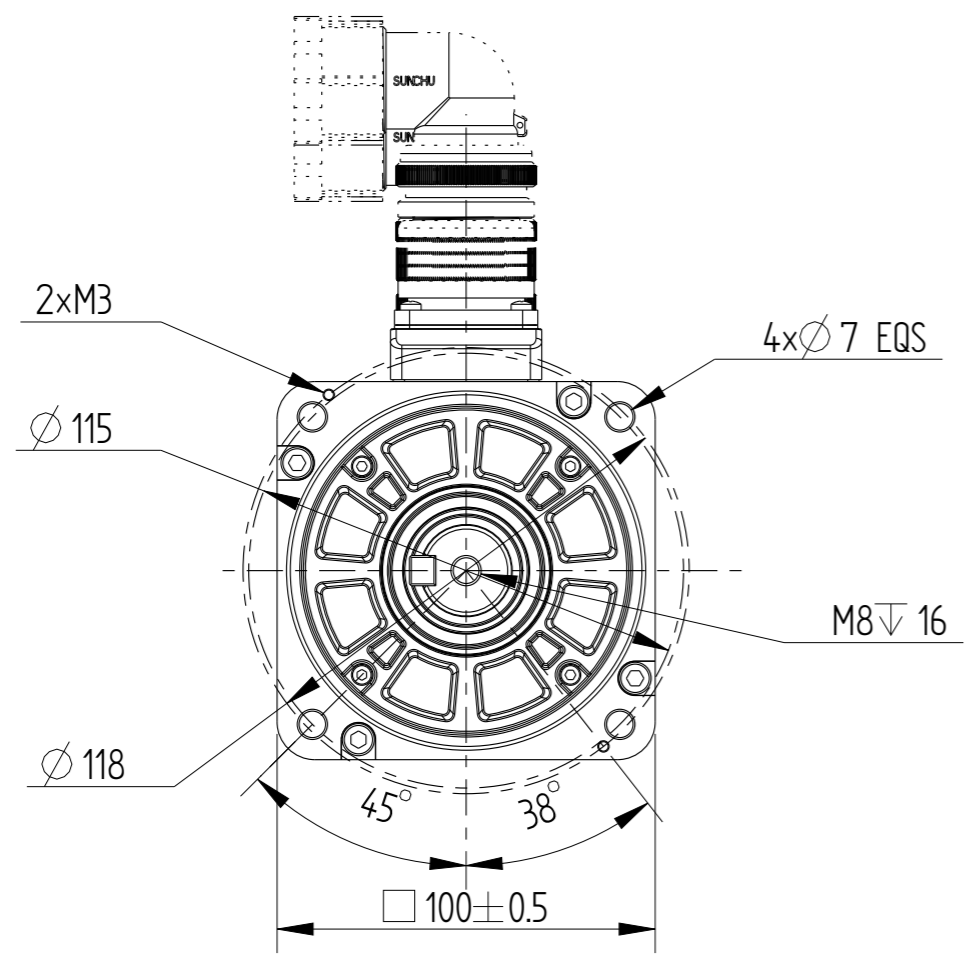


Basic function parameters	
Rated power KW	1
Rated voltage V	220
Rated current A	6.4
Peak current at rated speed A	23
Rated torque Nm	3.18
Peak torque at rated speed Nm	9.54
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg·cm ²	1.78±10%
Encoder resolution	26bit
Insulation class	F(155° C)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

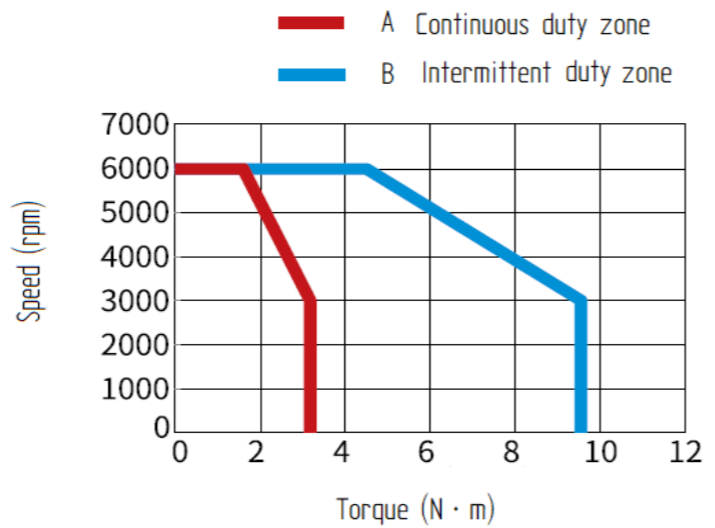

Dimension of shaft end

Dimension of shaft end with key

				Motor Outline Drawing			01118115-WX	
B01	New Archive	/	20230912					
Version	Change method	Changed by	Date					
Design	/			/			Mark	INOVANCE
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			3.85kg	12	B01	Model	MS1H2-10C30CB-S631R-INT
Approve	/							