

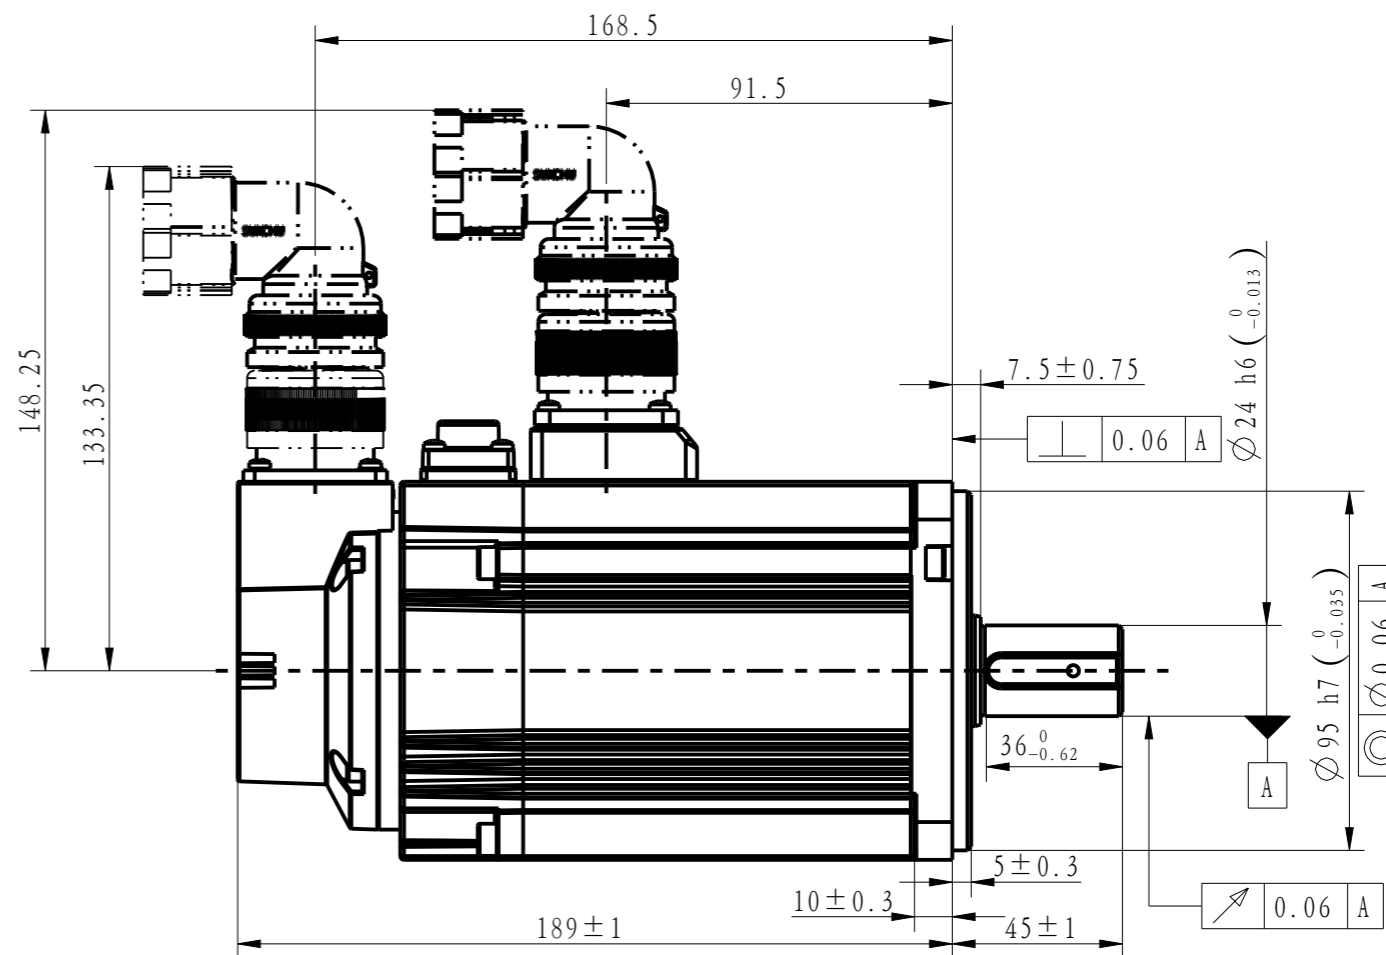
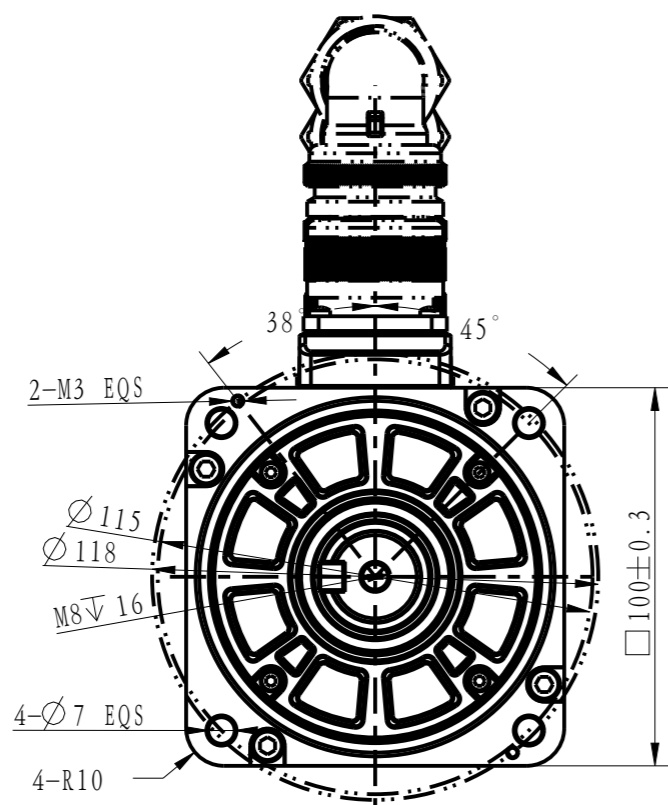



Amendment	Description

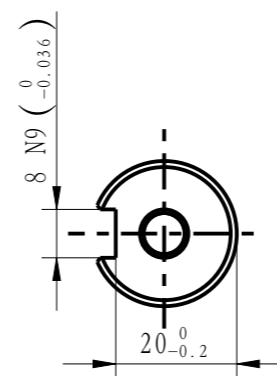


Basic function parameters	
Rated power kW	1.5
Rated voltage V	220
Rated current A	≤ 8.6
Peak current at rated speed A	≤ 32
Rated torque Nm	4.9
Peak torque at rated speed Nm	14.7
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg*cm ²	$3.17 \pm 10\%$
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	8
Brake power supply	$QC24 \pm 10\%$
Duty cycle	S1
Radial line load N	≤ 686
Axial load N	≤ 196

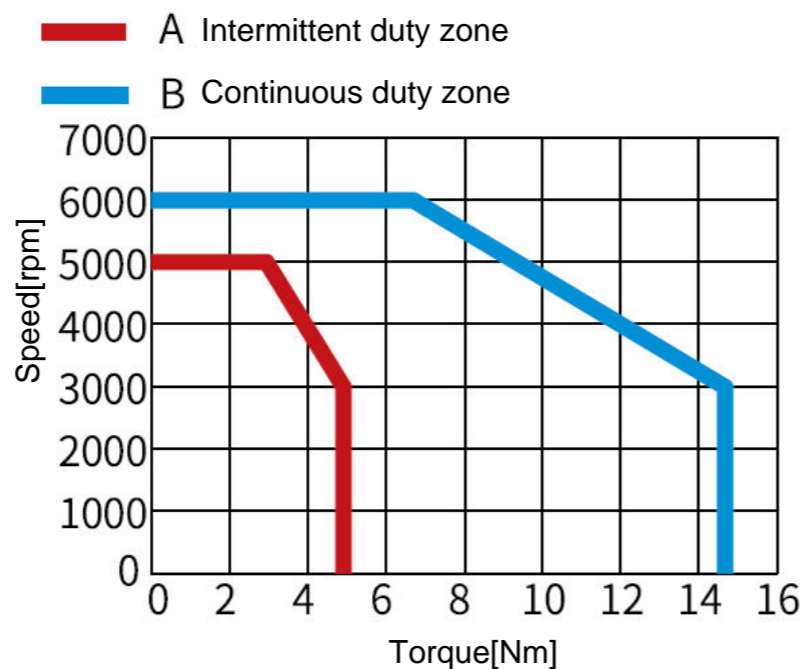


Dimension of shaft end

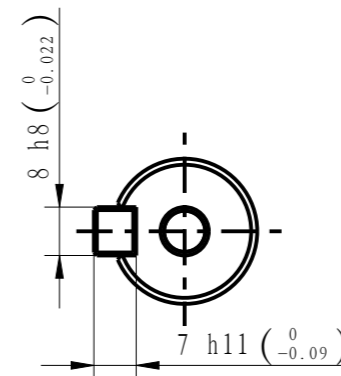

Dimension of shaft end with key

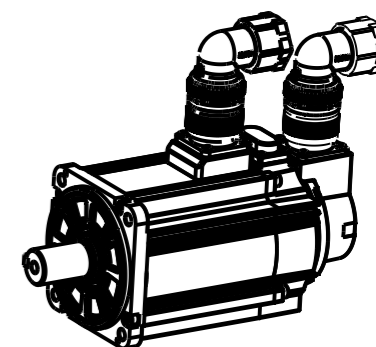

				Motor outlin Drawing			01117887-WX	
B00	New Archive	/	20230911					
Version	Change method	Changed by	Date					
Design	/			/			Mark	 INOVANCE
Check	/							
Craft	/							
Verify	/							
stangardization	/			Weight	Scale	Version	Page 1 of 1	
Approve	/			5.75kg	1:2	B00	Model	MS1H2-15C30CB-A634R-INT