



正样  
20230909  
B00

INOVANCE





Copyright: Copyright infringement reserved


外部公开

Amendment	Description

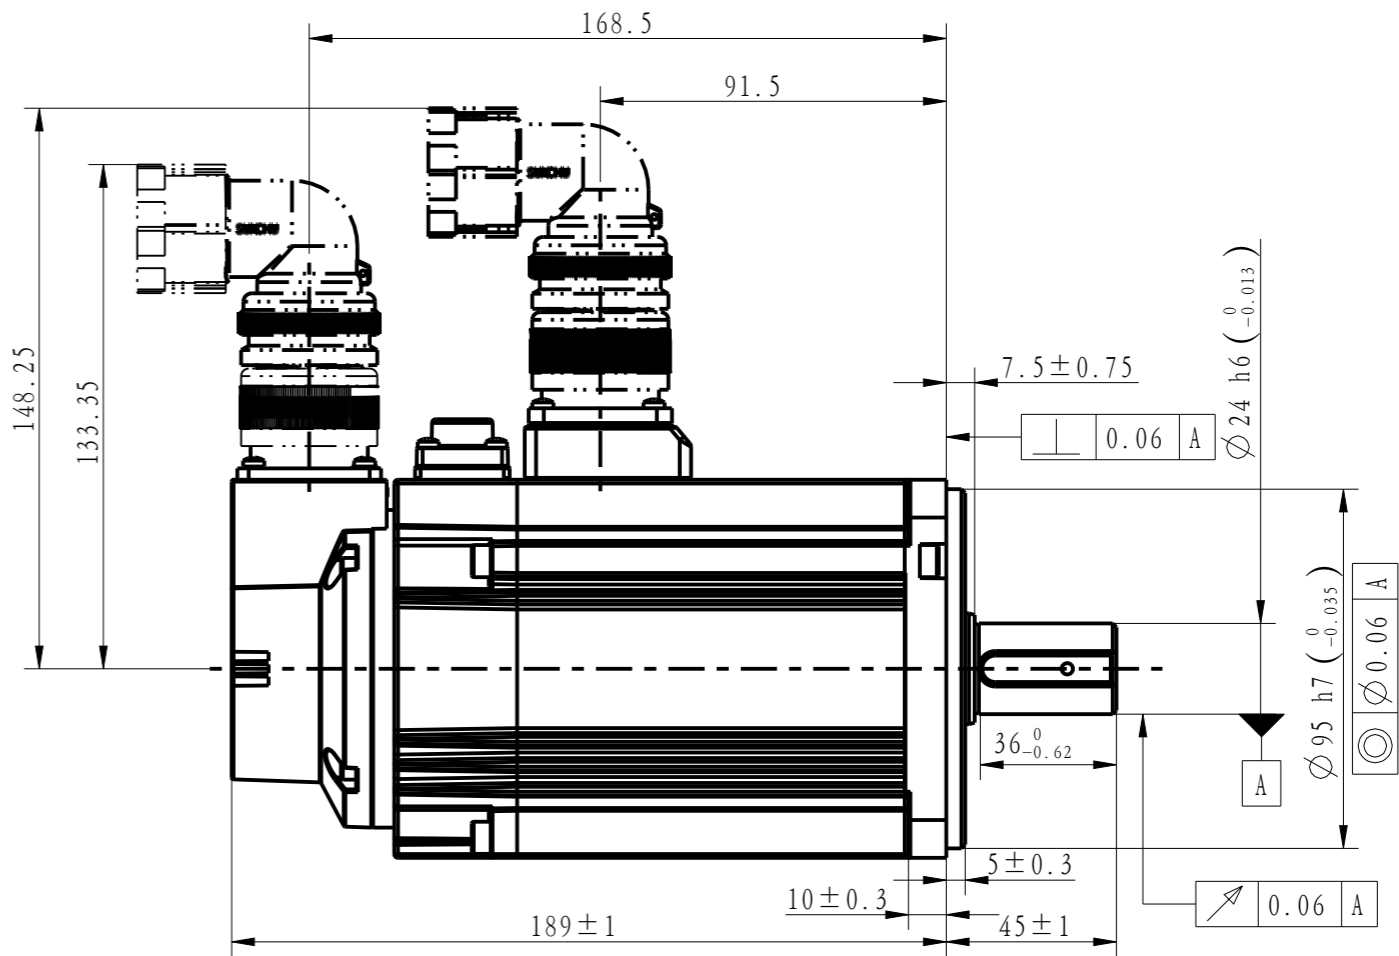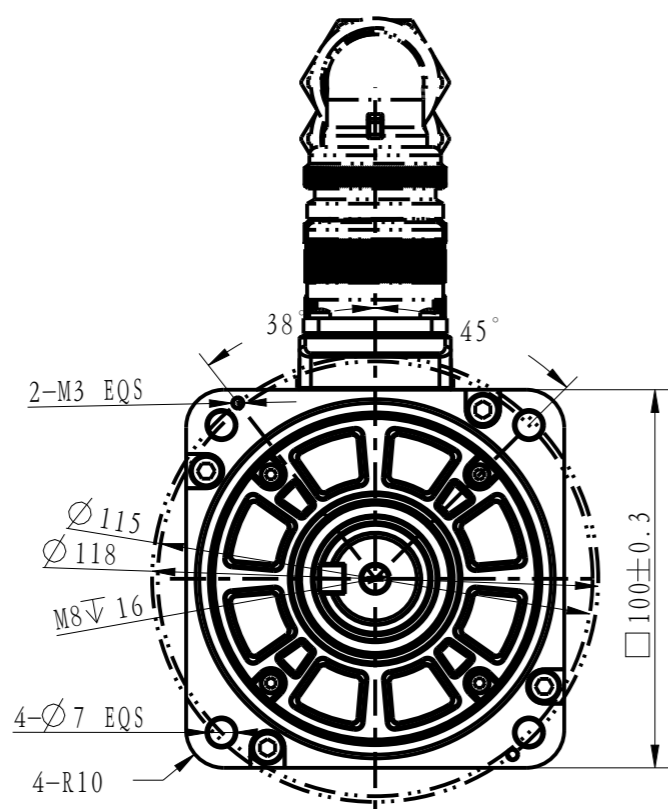

Basic function patmeters	
Rated power kW	1.5
Rated voltage V	380
Rated current A	≤4.2
Pea current at rated speed A	≤14
Rated torque Nm	4.9
Peak torque at rated speed Nm	14.7
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg*cm <sup>2</sup>	3.17±10%
Encoder resolution	23bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	8
Brake power supply	QC24±10%
Duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

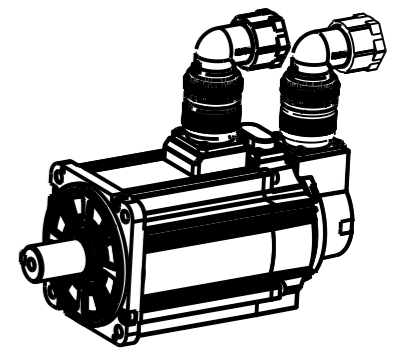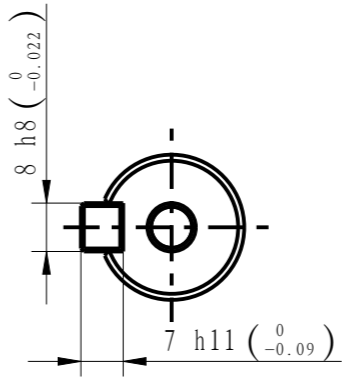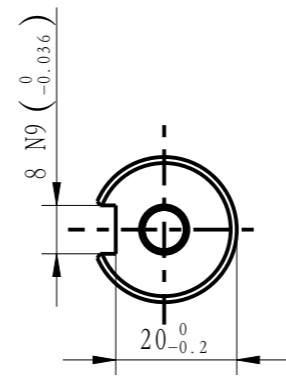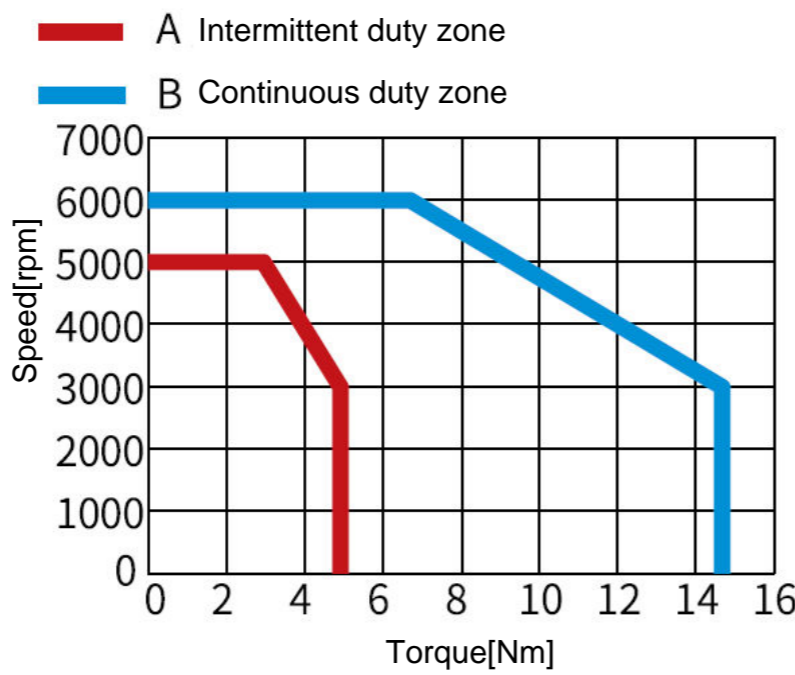

				Motor outlin Drawing			01117919-WX		
B00	New Archive	/	20230911						
Version	Change method	Changed by	Date						
Design	/			/			Mark	 <b>INOVANCE</b>	
Check	/								
Craft	/								
Verify	/			Weight	Scale	Version	Page 1 of 1		
stangardization	/			5.75kg	1:2	B00	Model	MS1H2-15C30CD-A334R-INT	
Approve	/								