

正样
2023.10.09
B00

Copyright: Copyright infringement reserves



INOVANCE

INOVANCE





外部公开

Amendment	Description

Unit: Millimeter (mm)

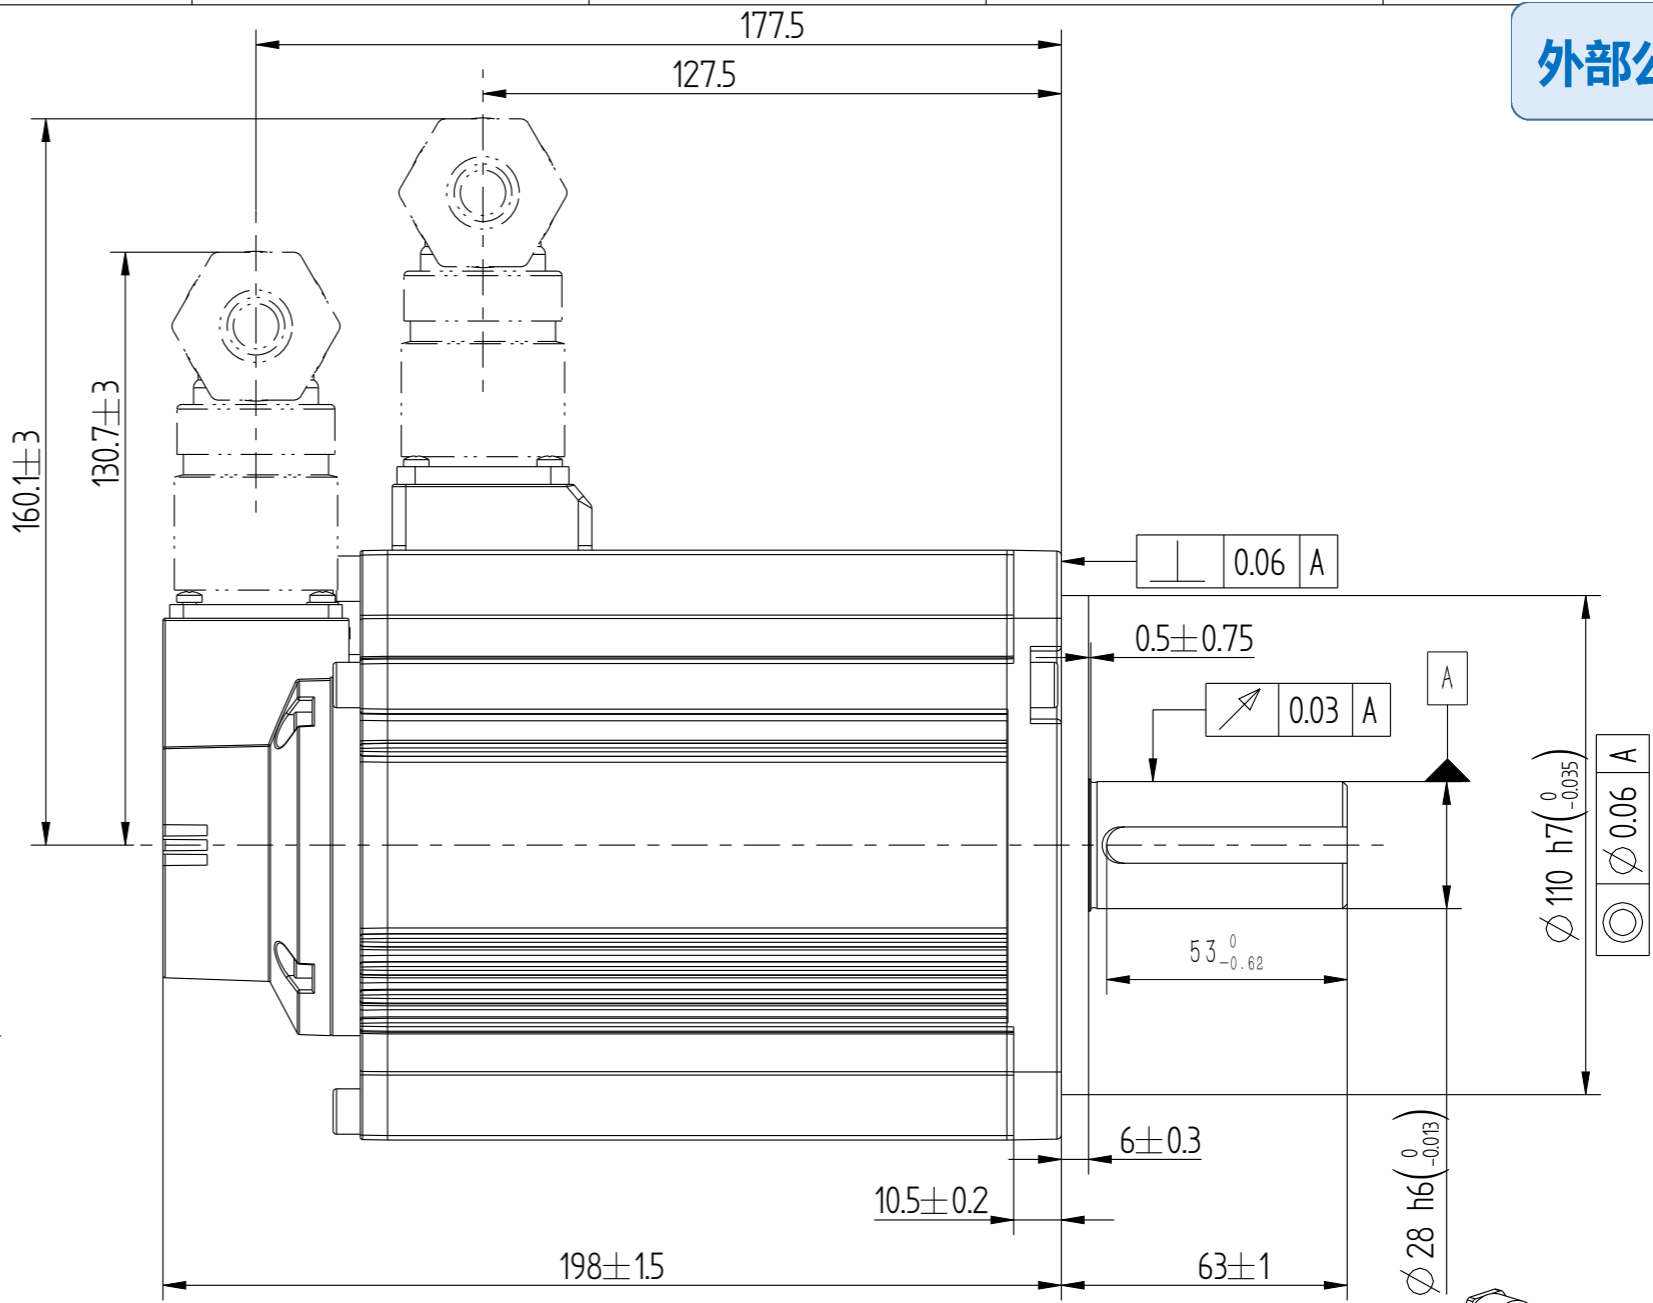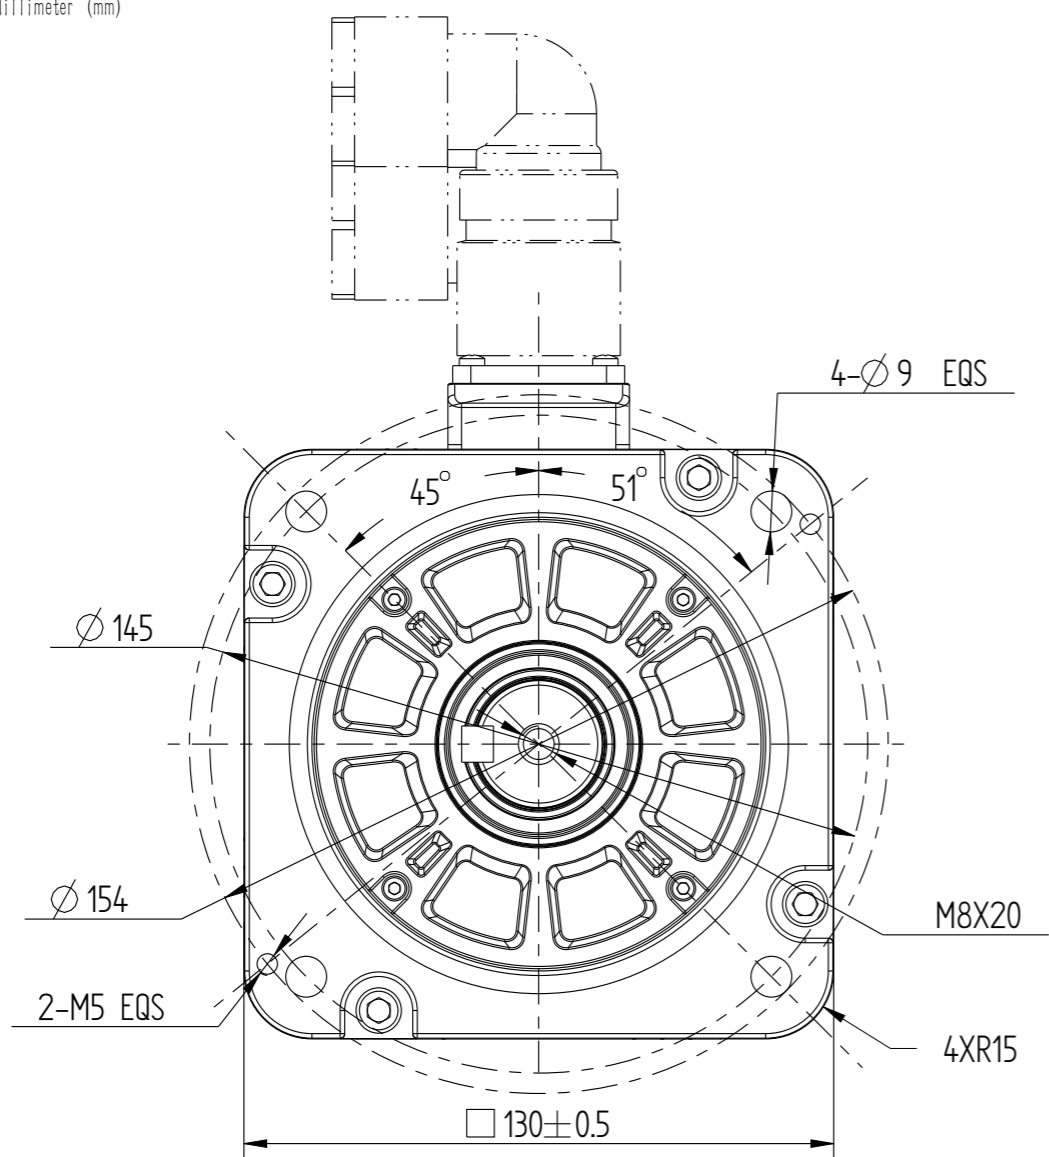

Basic function parameters	
Rated power KW	3
Rated voltage V	220
Rated current A	≤16.6
Peak current at rated speed A	≤55
Rated torque Nm	9.8
Peak torque at rated speed Nm	24.5
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg·cm ²	6.4±10%
Encoder resolution	26bit
Insulation class	F(155℃)
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤1176
Axial load N	≤392

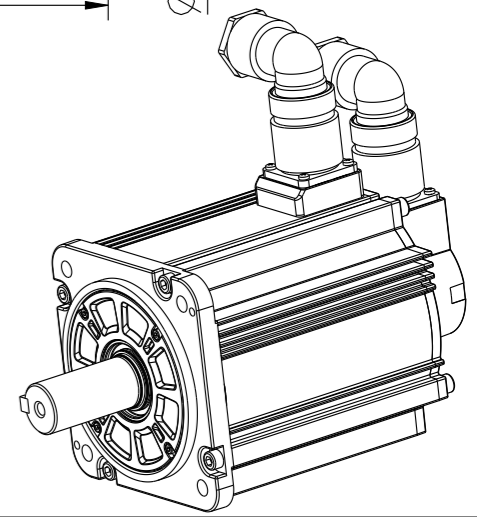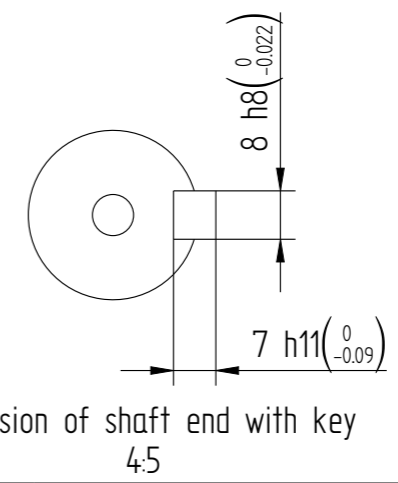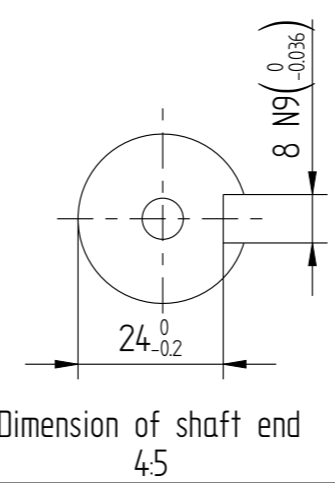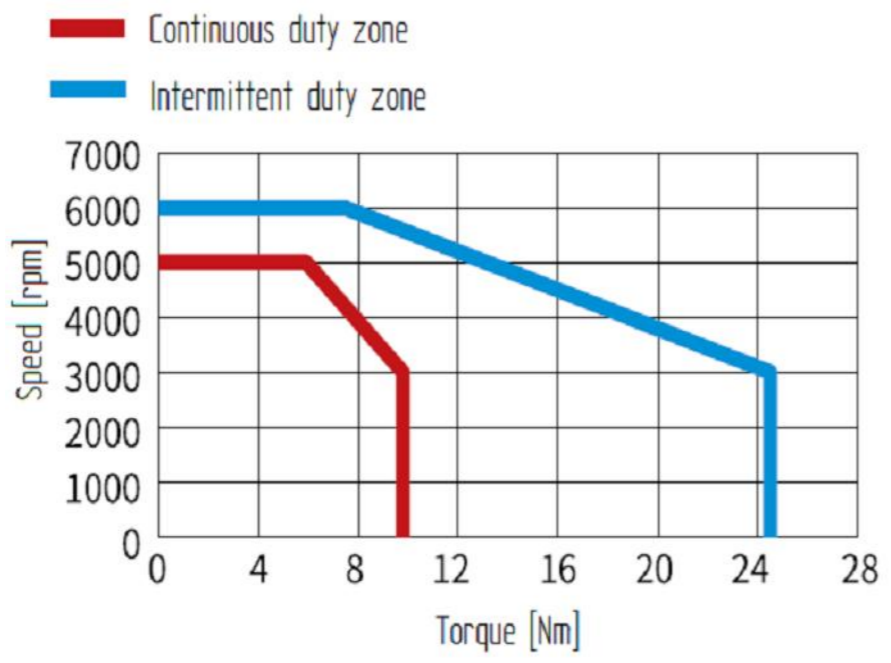

Motor Outline Drawing				01117899-WX	
B00	New Archive	/	20230816	/	
Version	Change method	Changed by	Date		
Design		/			
Check		/			
Craft		/		10 kg	
Verify		/			
Standardization		/			
Approve		/		35	B00
				Model	MS1H2-30C30CB-A631R-INT