
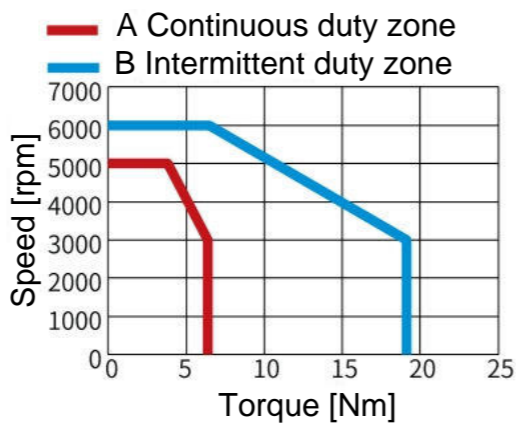
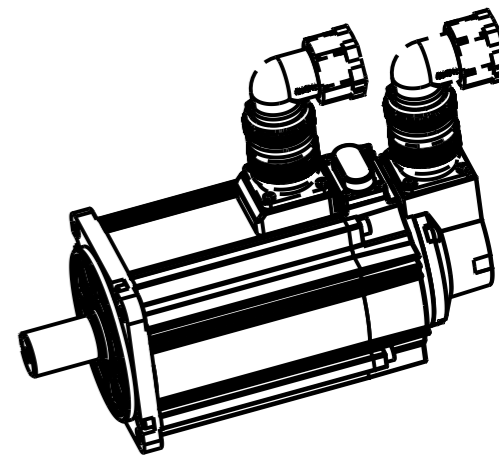
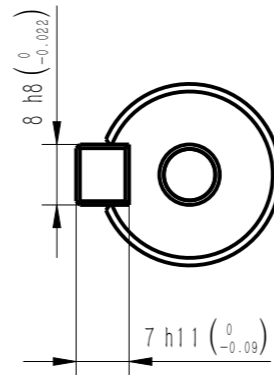
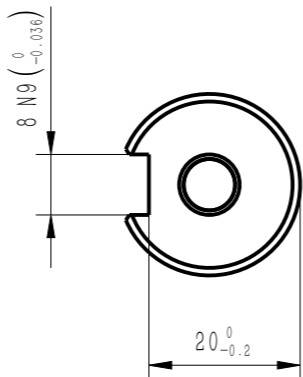
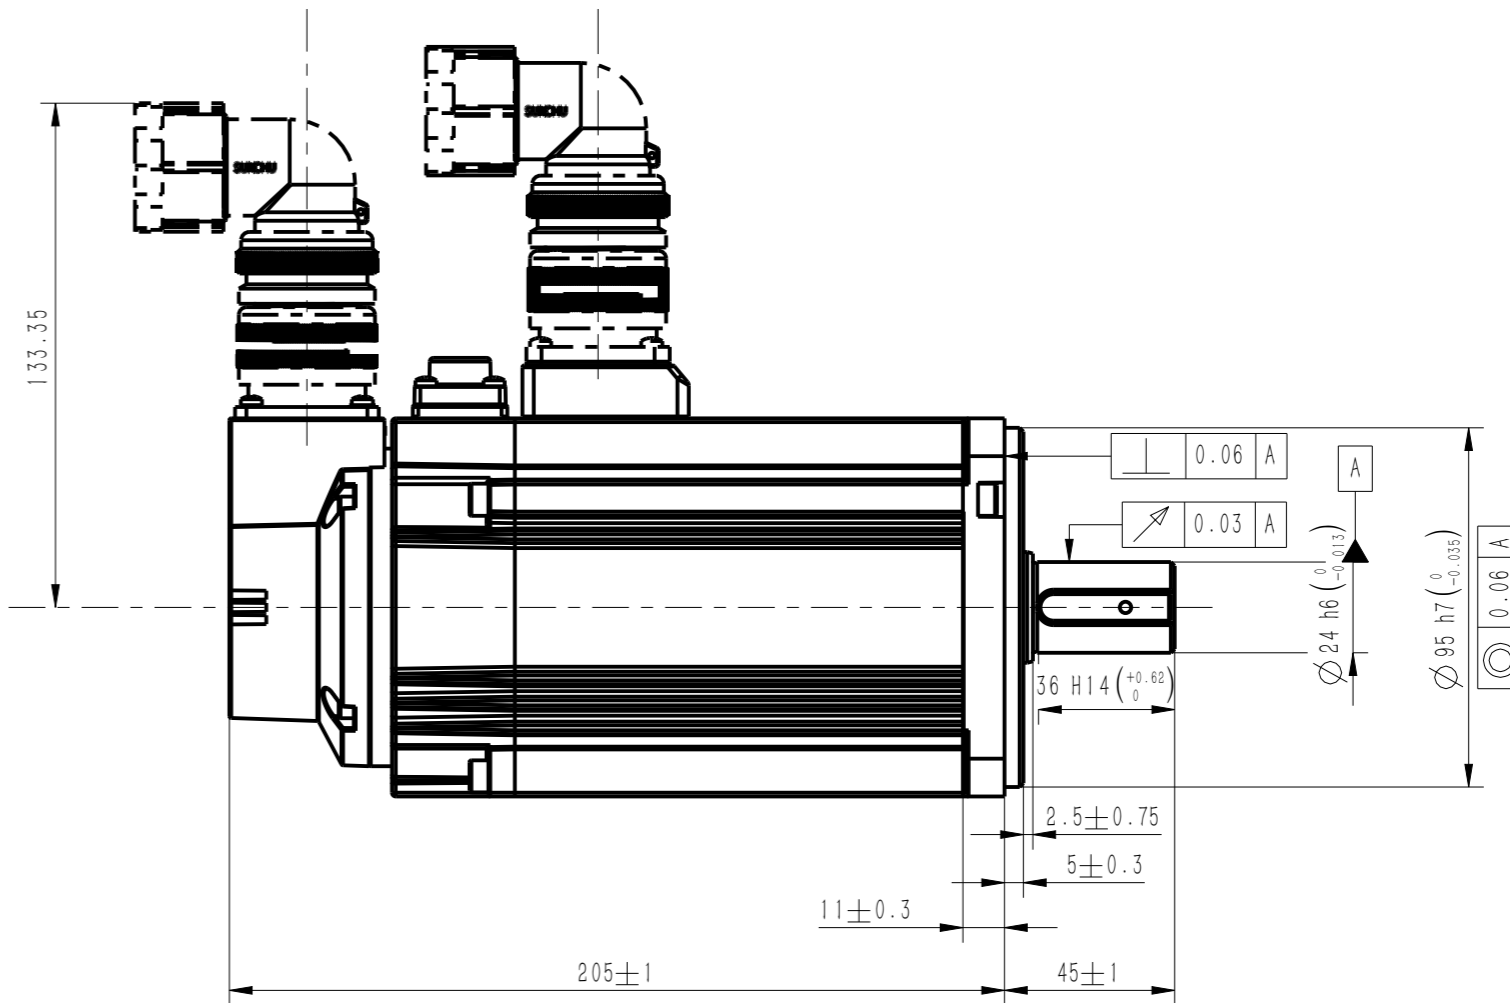


正样
2023.10.07
B00


Copyright: Copyright infringement reserved.

外部公开

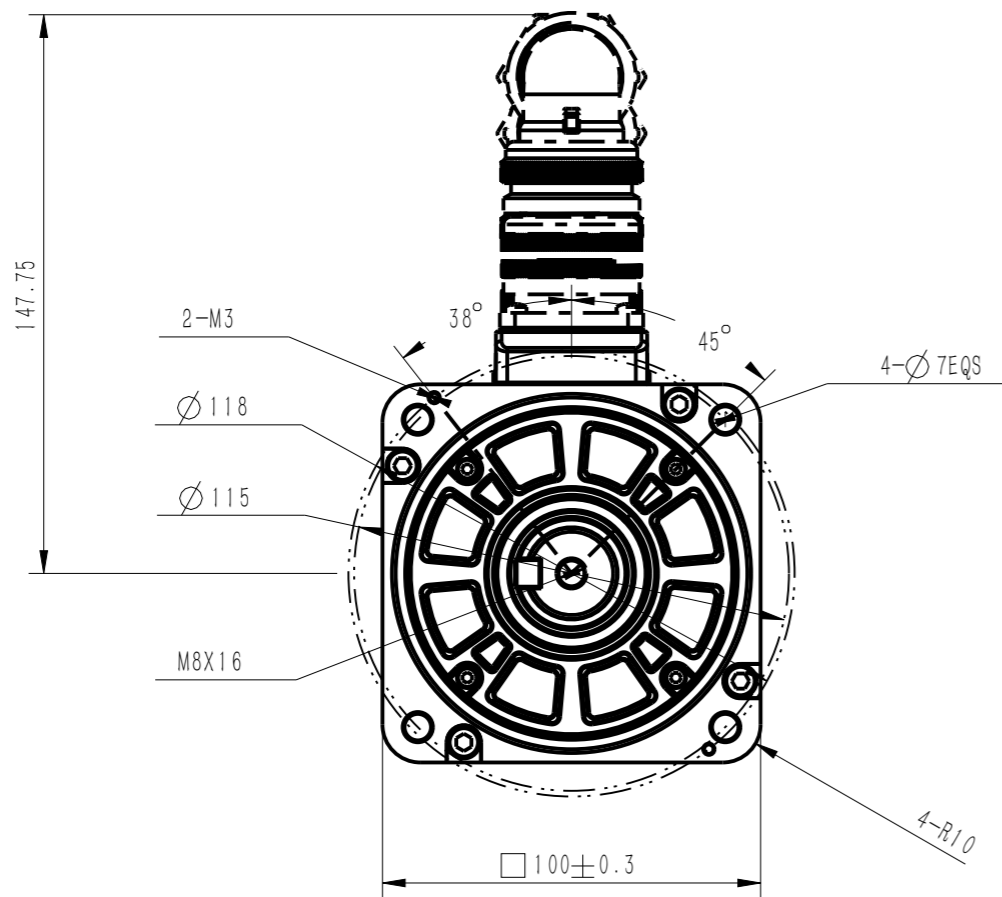

Dimension of shaft end

Dimension of shaft end with key

				Motor Outline Drawing			01117891-WX	
B00	New Archive	/	20230916					
Version	Change method	Change by	Date					
Design	/			/			Mark	 INOVANCE
Check	/							
Craft	/							
Verify	/							
Standardization	/			Weight	Scale	Version	Page 1 of 1	
Approve	/			kg	1 : 2	B00	Model	MS1H2-20C30CB-A634R-INT

Basic function parameters

Rated power kW	2.0
Rated voltage V	220
Rated current A	≤11.3
Peak current at rated speed A	≤42
Rated torque Nm	6.36
Peak torque at rated speed Nm	19.1
Rated speed rpm	1500
Max speed rpm	4500
Rotor inertia kg*cm ²	3.74
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	8
Brake power supply V	24(±10%)
duty cycle	S1
Radial line load N	≤686
Axial load N	≤196

INOVANCE