



正样
2024.04.03
B00

版权所有:侵权必究







苏州汇川技术有限公司


A3


外部公开

Amendment	Description

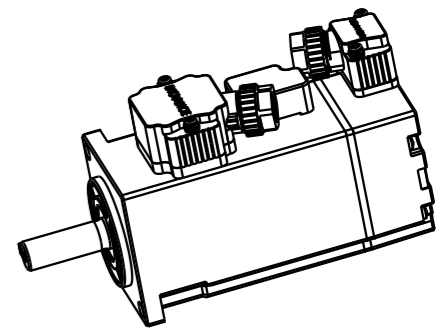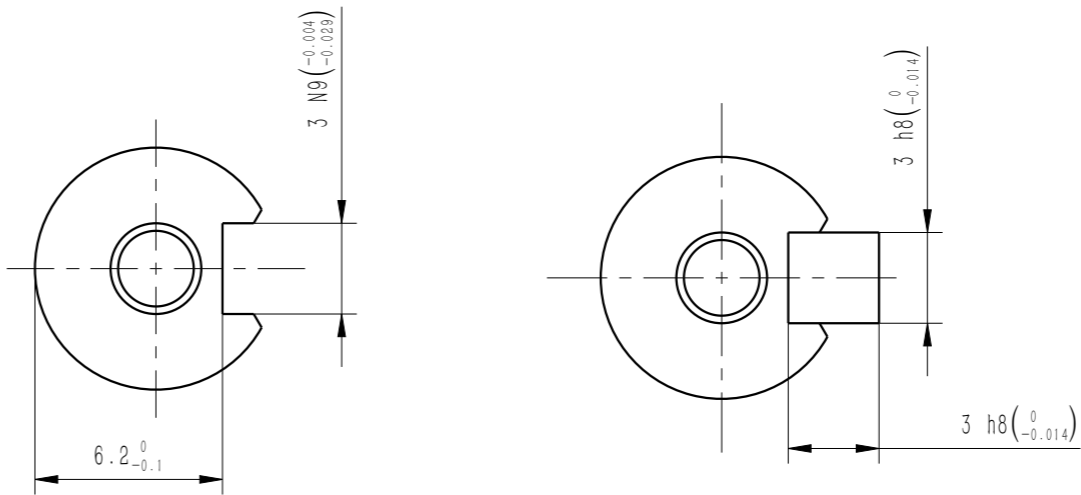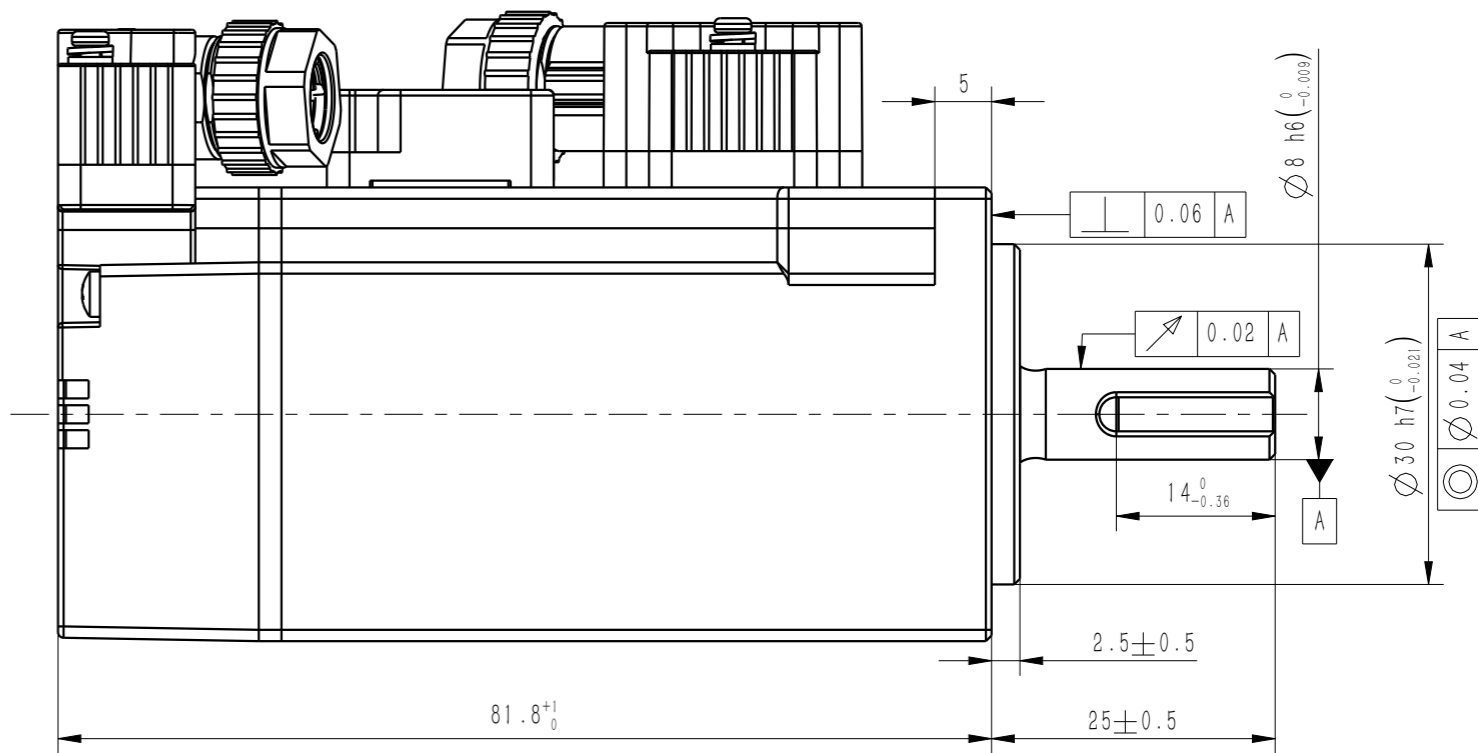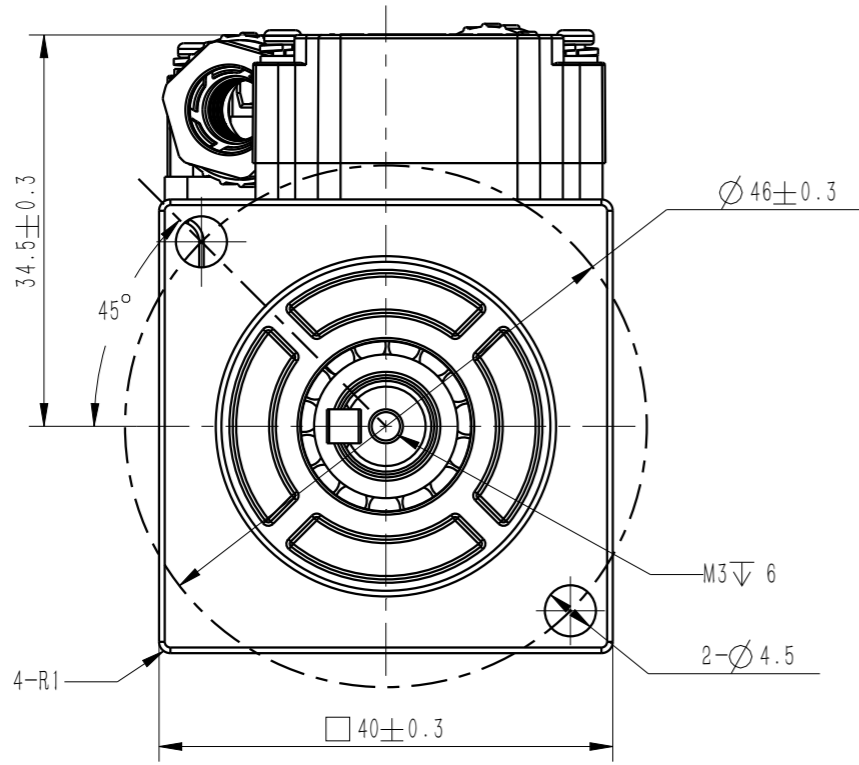

Basic function parameters	
Rated power KW	0.55
Rated voltage V	220
Rated current A	1.2
Peak current at rated speed A	4.8
Rated torque Nm	0.16
Peak torque at rated speed Nm	0.56
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm2	0.0208±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	≥0.32
Brake power supply	DC24V±10%
Duty cycle	S1
Radial line load N	≤78
Axial load N	≤54

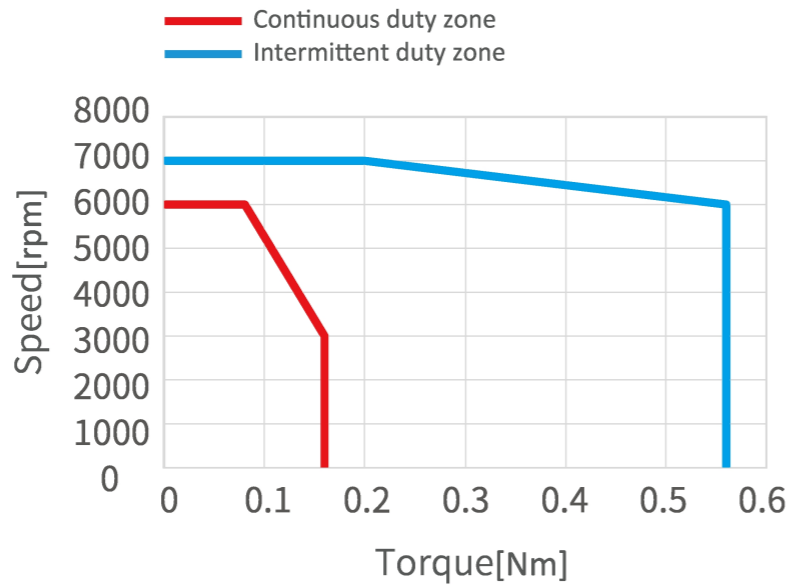

				Motor Outline Drawing			01119464-WX	
B00	New Archive	/	20230825					
Version	Change method	Changed by	Date				Mark	 INOVANCE
Design	/							
Check	/							
Craft	/							
Verify	/ 比例 4:1			Weight	Scale	Version	Page 1 of 1	
Standardization	/			0.43 kg	1:1	B00	Model	MS1H1-05B30CB-A632R-INT
Approve	/							