
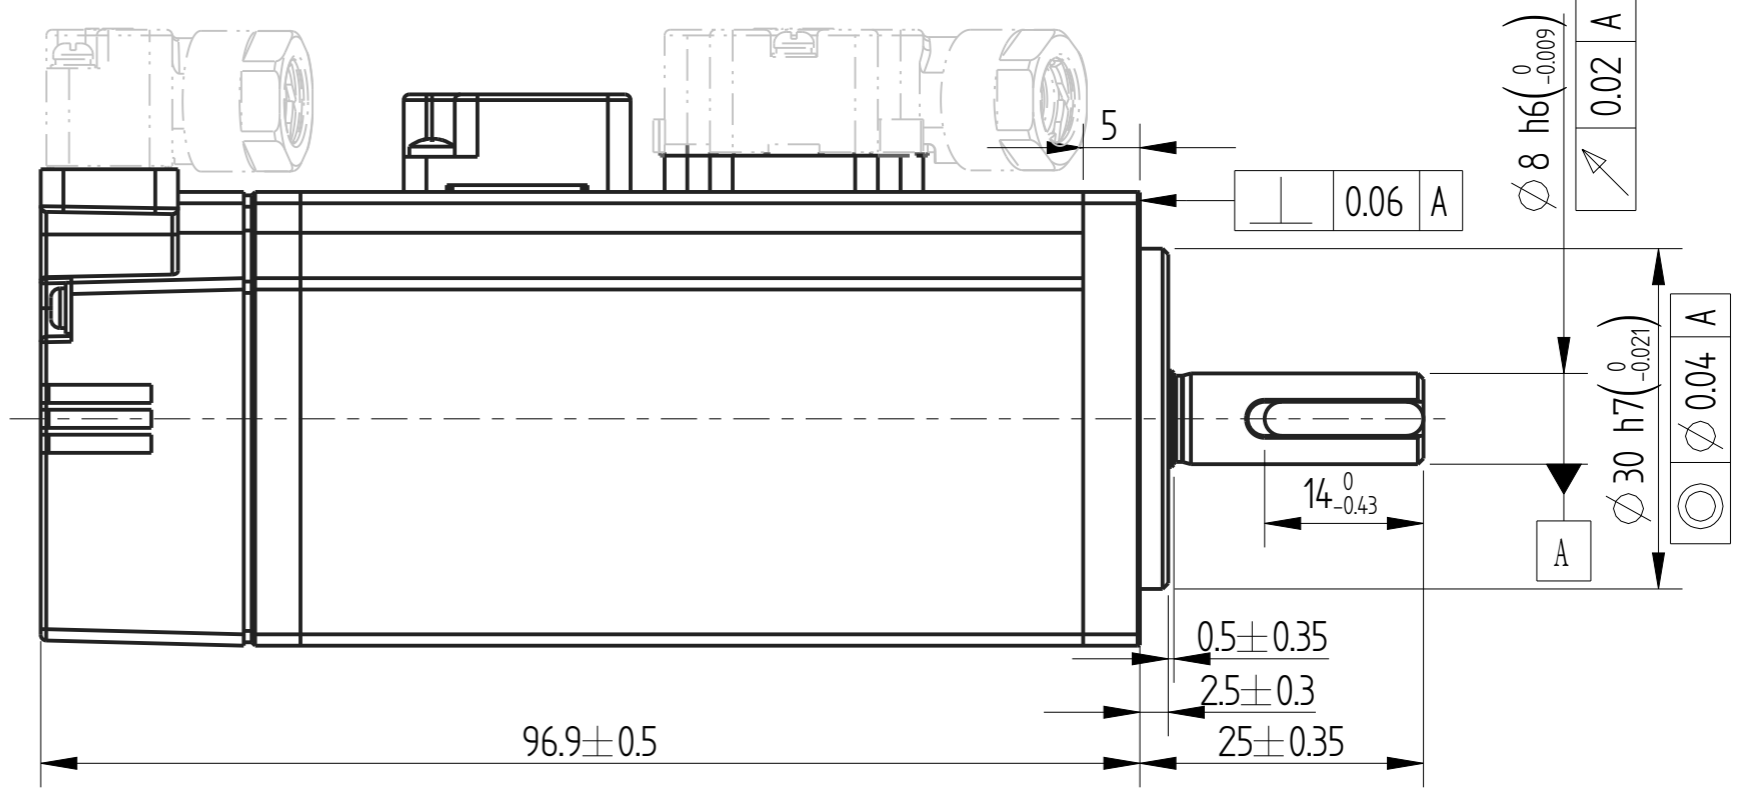


正样
2023.09.25
B00



Copyright:Copyright infringement reserved.

INOVANCE


外部公开

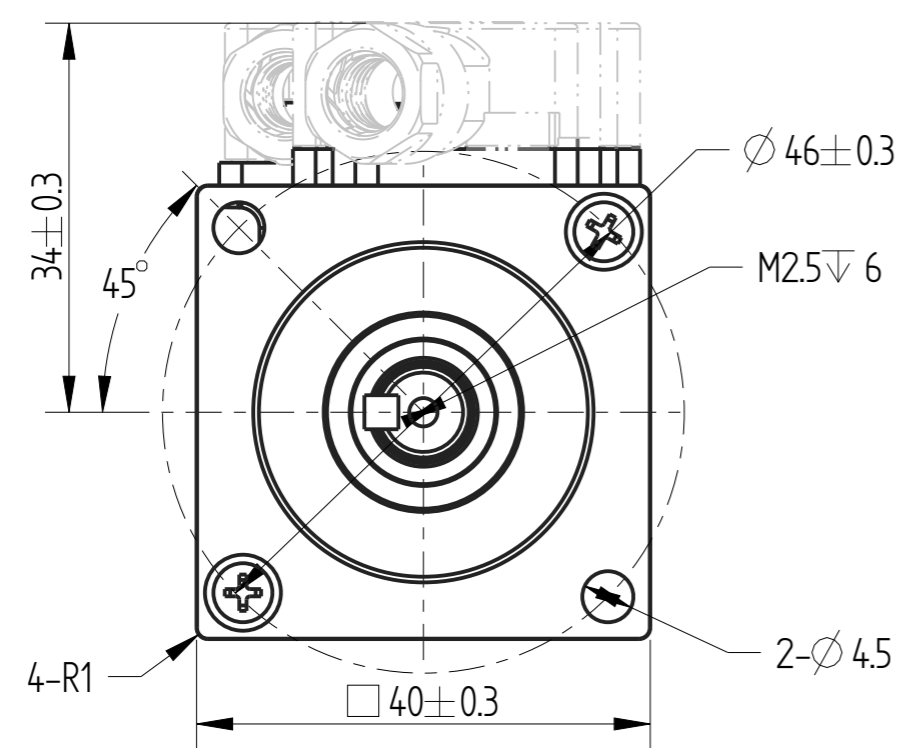


Basic function parameters	
Rated power KW	0.05
Rated voltage V	220
Rated current A	≤1.3
Peak current at rated speed A	≤4.7
Rated torque Nm	0.16
Peak torque at rated speed Nm	0.56
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm ²	0.028
Encoder resolution	26bit
Insulation class	F
Protection Level	IP67
Static torque of brake Nm	≥0.32
Brake power supply	DC24±10%
Duty cycle	S1
Radial line load N	≤78
Axial load N	≤54

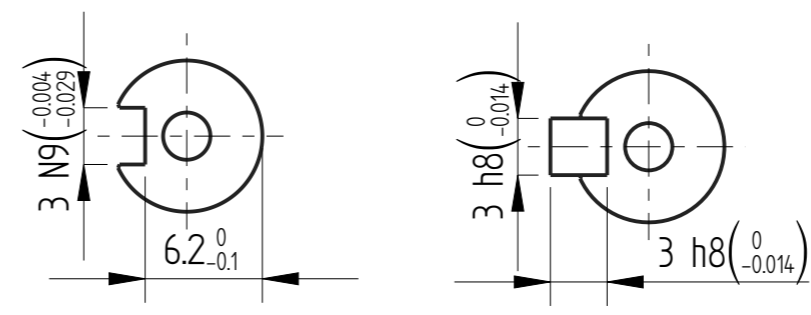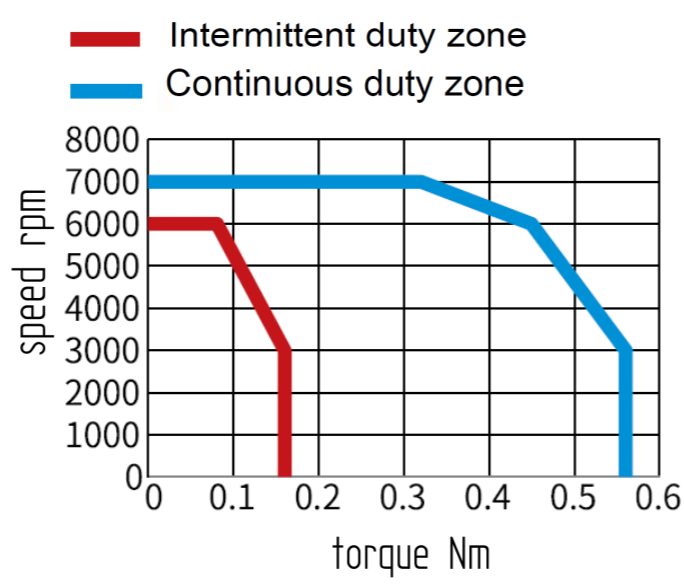

Dimension of shaft end Dimension of shaft end with key

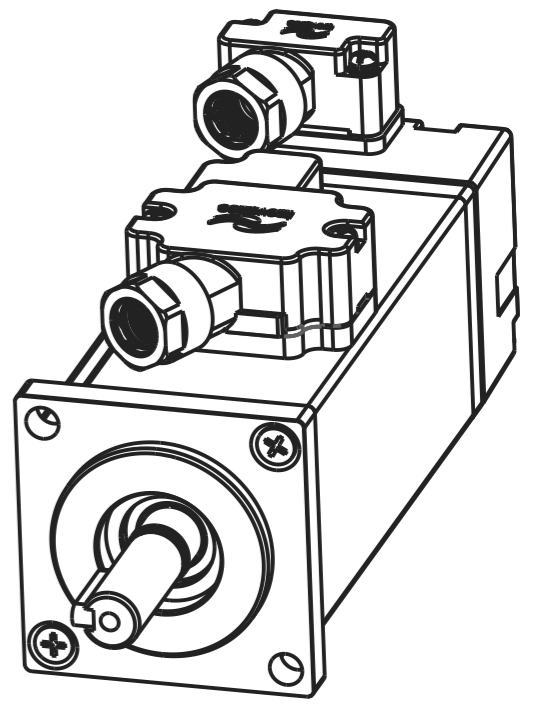

				Motor outline drawing			01118060-WX		
B00	New Archive	/	20230907						
Version	Change method	Change by	Date						
Design	/			/			Mark		INOVANCE
Check	/								
Craft	/								
Verify	/								
Standardization	/			Weight	Scale	Version	Page 1 of 1		
Approve	/			/	1:1	B00	Model	MS1H1-05B30CB-S632Z-INT	