



正样
2023.09.25
B00

外部公开



Copyright:Copyright infringement reserved.





INOVANCE

A3


Amendment	Description

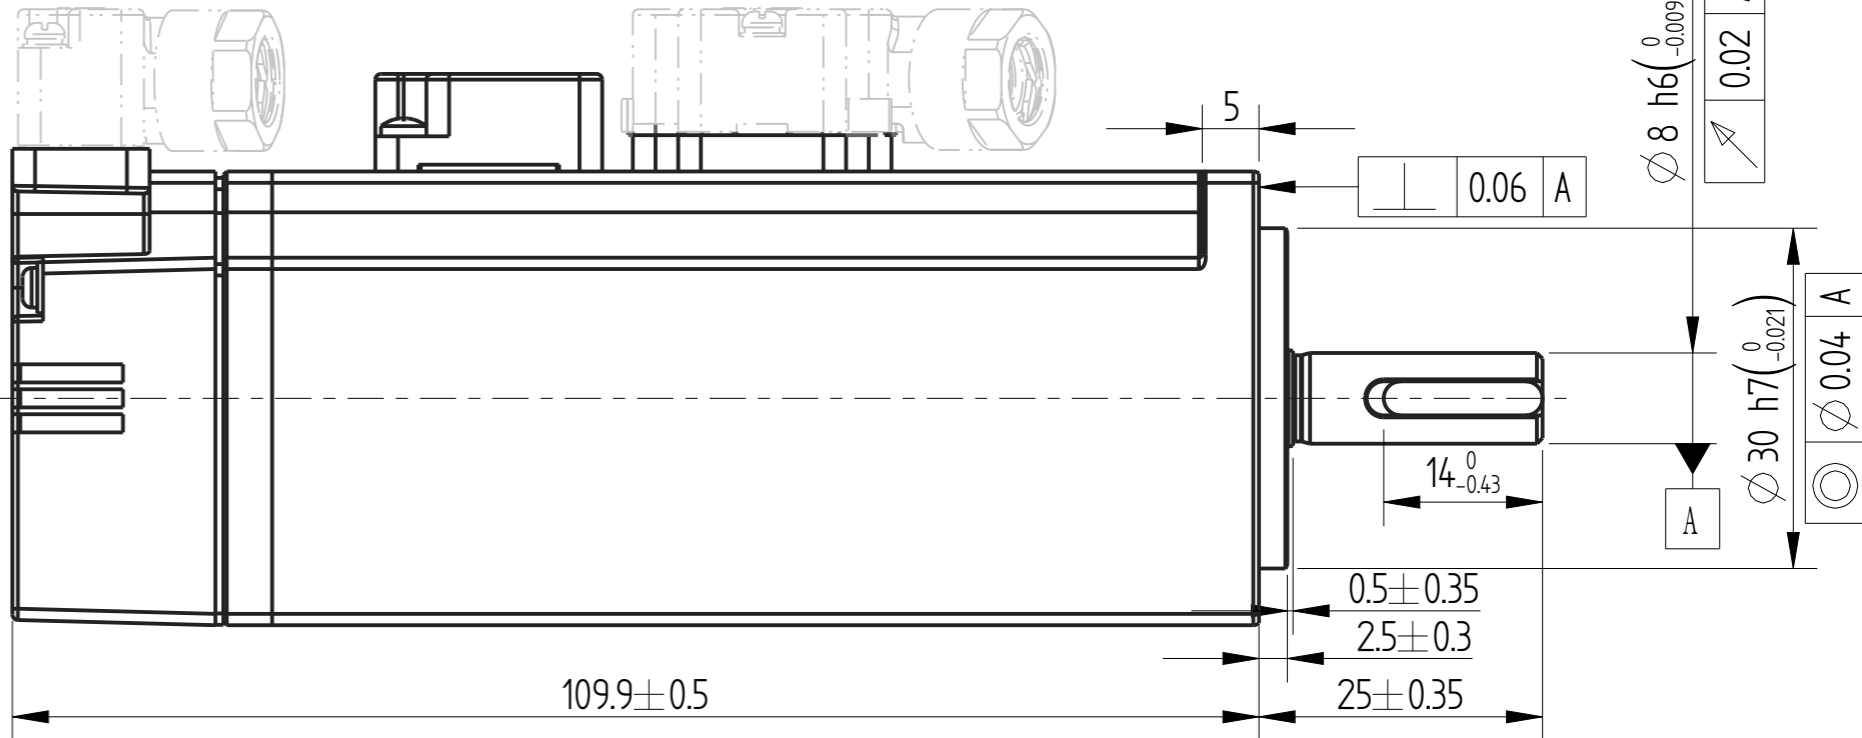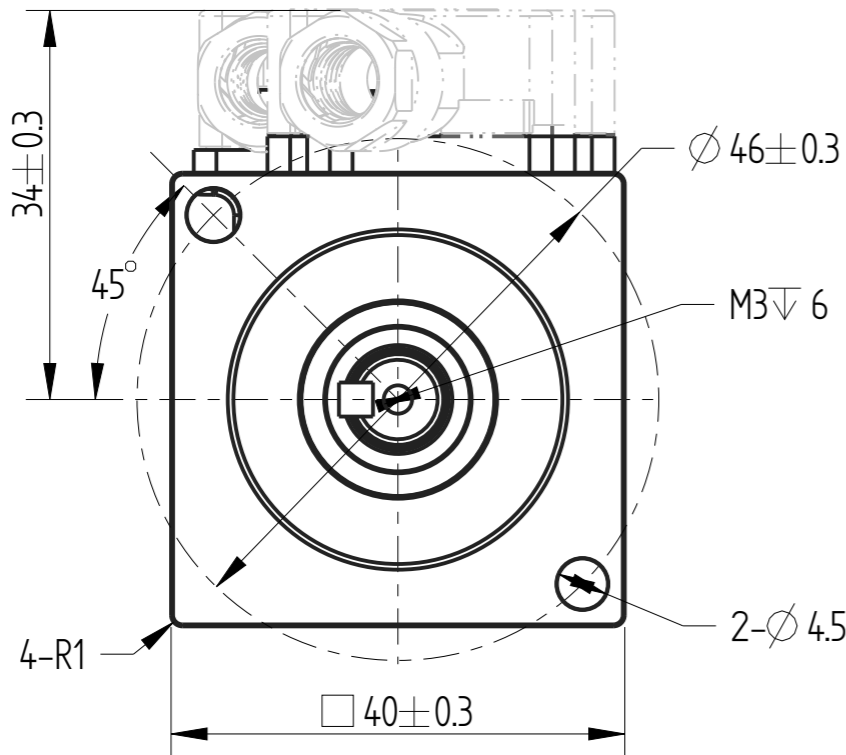


Basic function parameters	
Rated power KW	0.1
Rated voltage V	220
Rated current A	≤1.3
Peak current at rated speed A	≤4.7
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm ²	0.102
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	≥0.32
Brake power supply	DC24±10%
Duty cycle	S1
Radial line load N	≤78
Axial load N	≤54

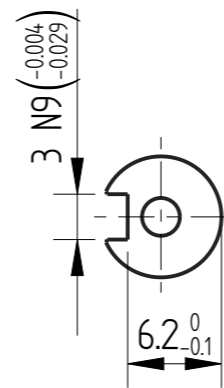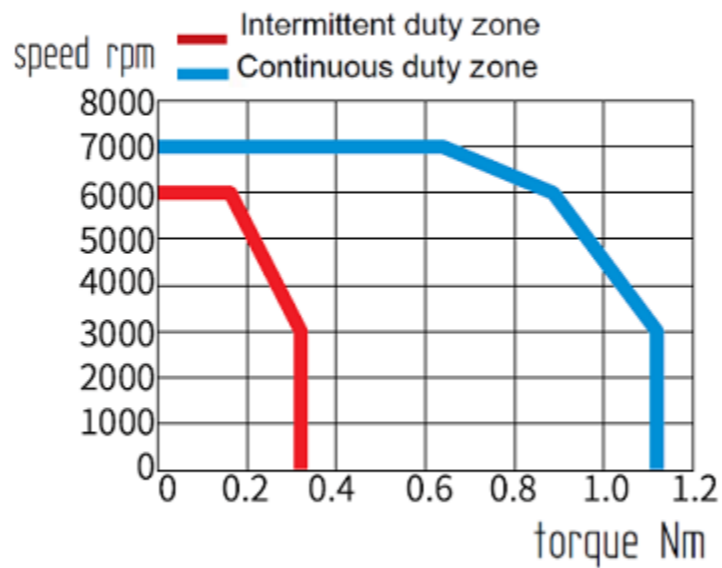


Dimension of shaft end

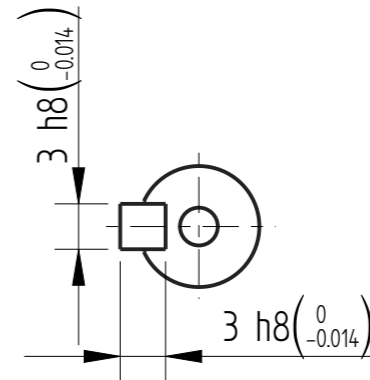

Dimension of shaft end with key

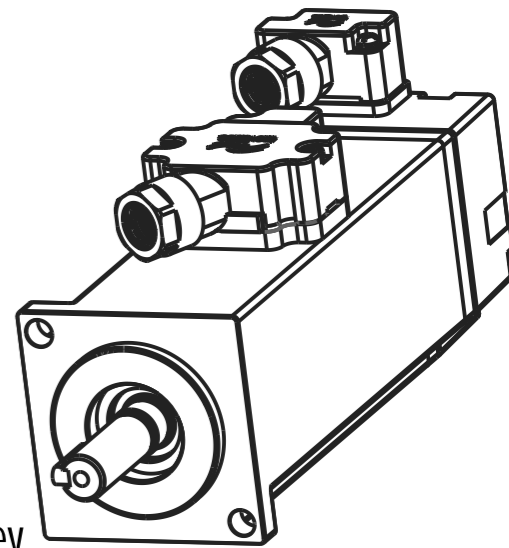

				Motor outline drawing	01118061-WX			
B00	New Archive	/	20230822					
Version	Change method	Change by	Date					
Design	/							
Check	/			/	Mark			
Craft	/							
Verify	/							
Standardization	/							
Approve	/			Weight	Scale	Version	Page 1 of 1	
				/	1:5:1	B00	Model	MS1H1-10B30CB-S632Z-INT